

INTERSECTION GEOMETRY

Learning Outcomes

5-2

At the end of this module, you will be able to:

1. Explain why tight/right angle intersections are best
2. Describe why pedestrians need access to all corners
3. Assess good crosswalk placement: where peds want to cross & where drivers can see them
4. Explain how islands can break up complex intersections

Intersection Crashes

Some basic facts:

5-3

1. Most (urban) crashes occur at intersections
2. 40% occur at signalized intersections
3. Most are associated with turning movements
4. Geometry matters: keeping intersections tight, simple & slow speed make them safer for everyone



5-4

Philadelphia PA

- Small, tight intersections best for pedestrians...
- Simple, few conflicts, slow speeds




5-5

Atlanta GA

Large intersections can work for pedestrians with mitigation

Skewed intersections

5-6

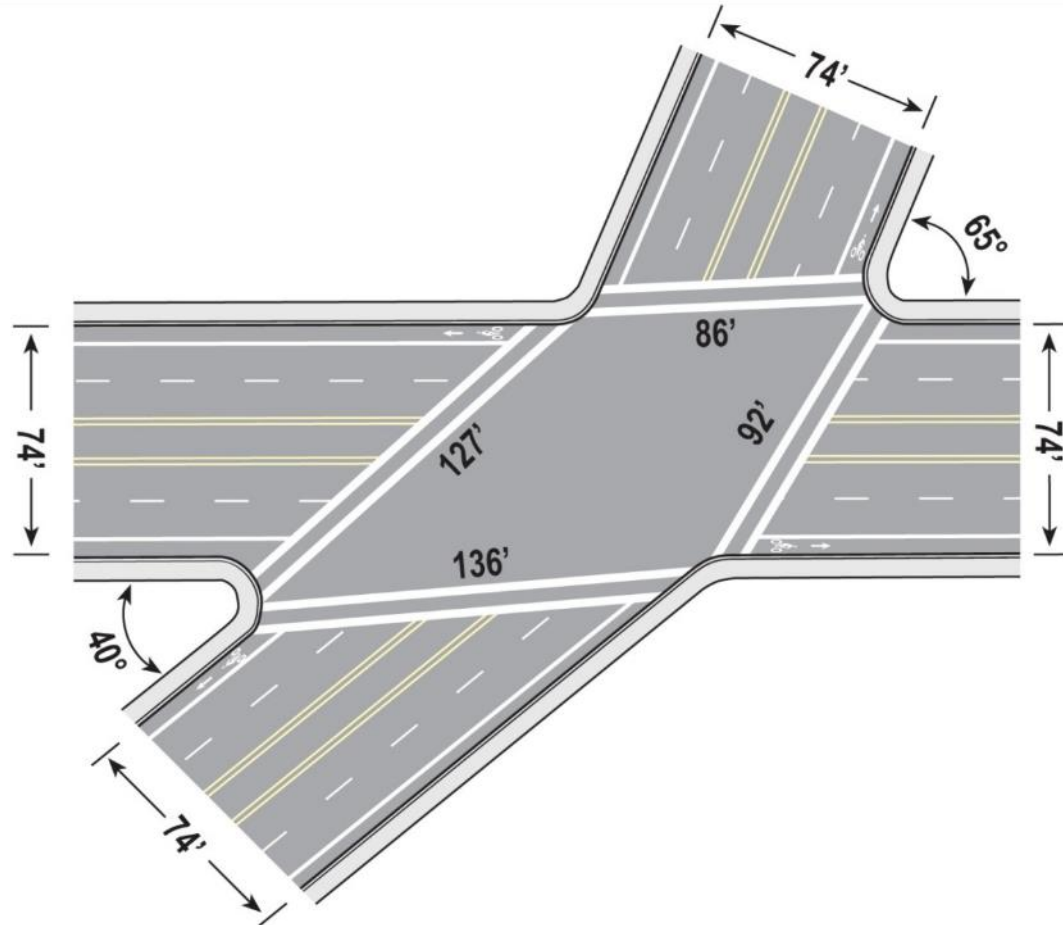

Skew increases crossing distance & speed of turning cars




5-7


Philadelphia PA

Cars can turn at high speed

Designing for Pedestrian Safety – Intersection Geometry

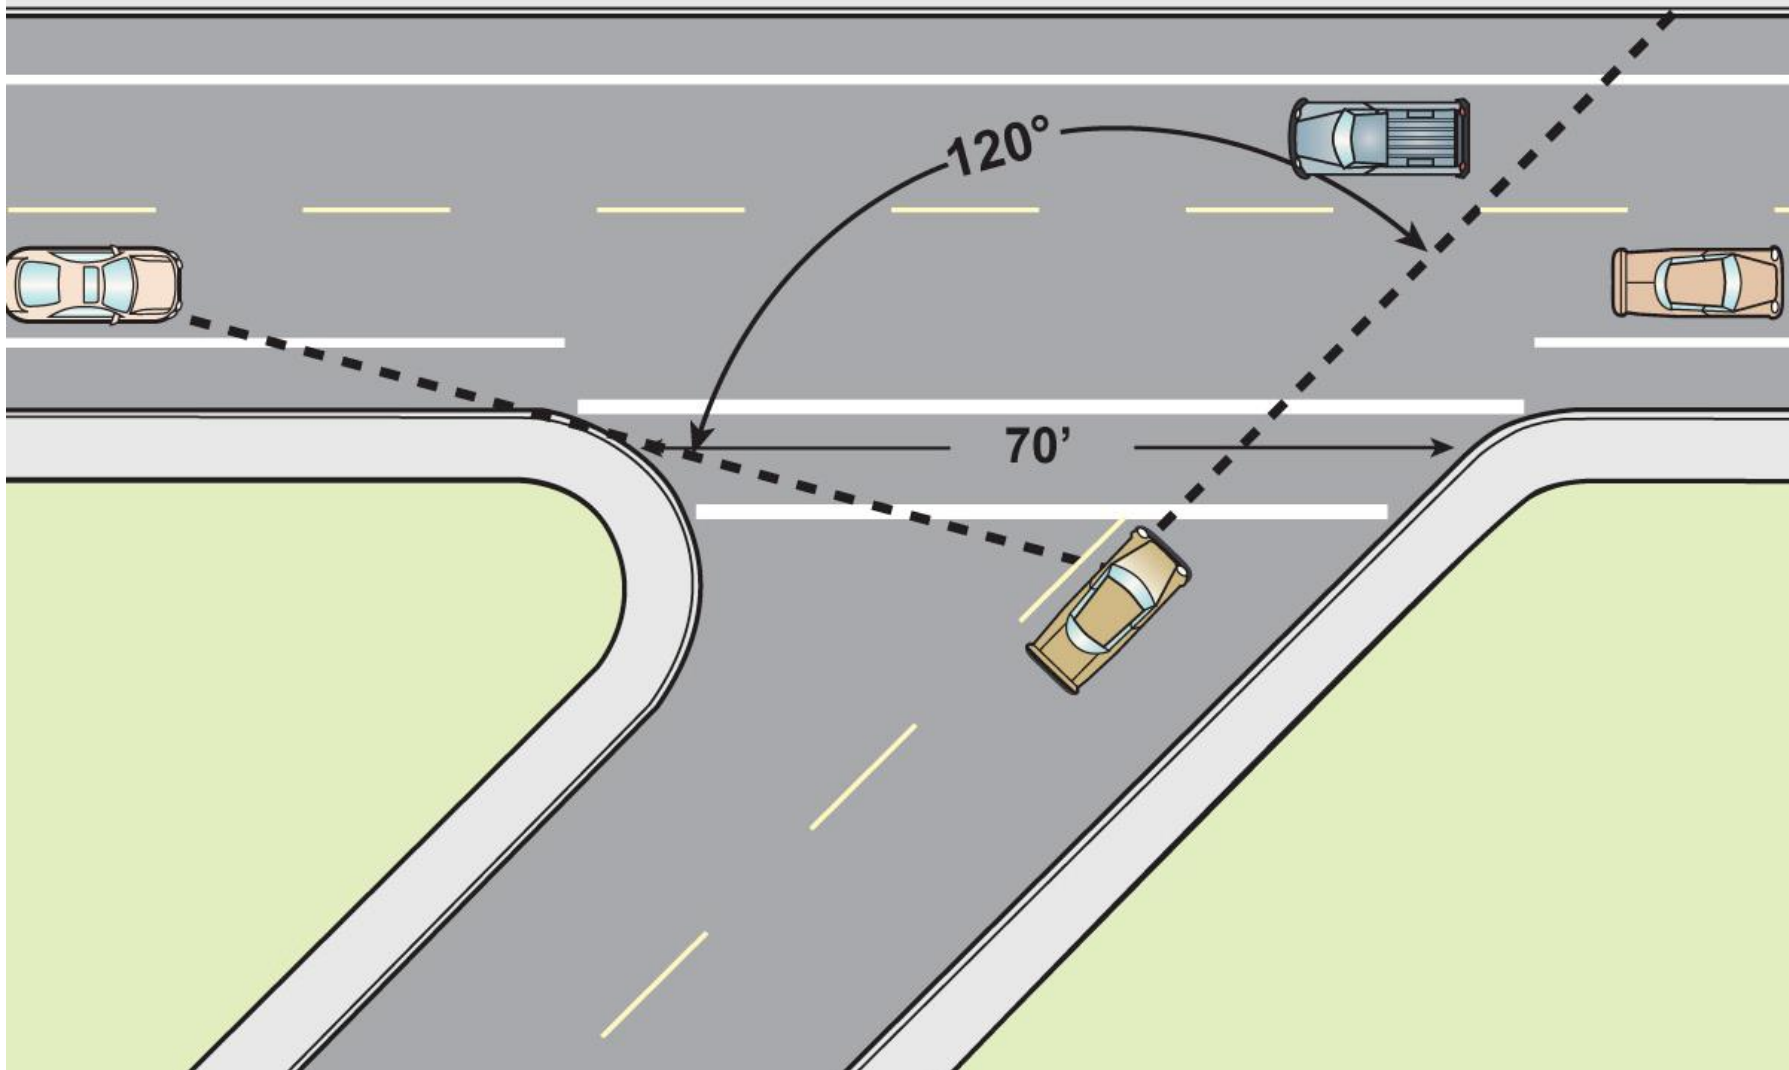

Skew increases crosswalk length, decreases visibility

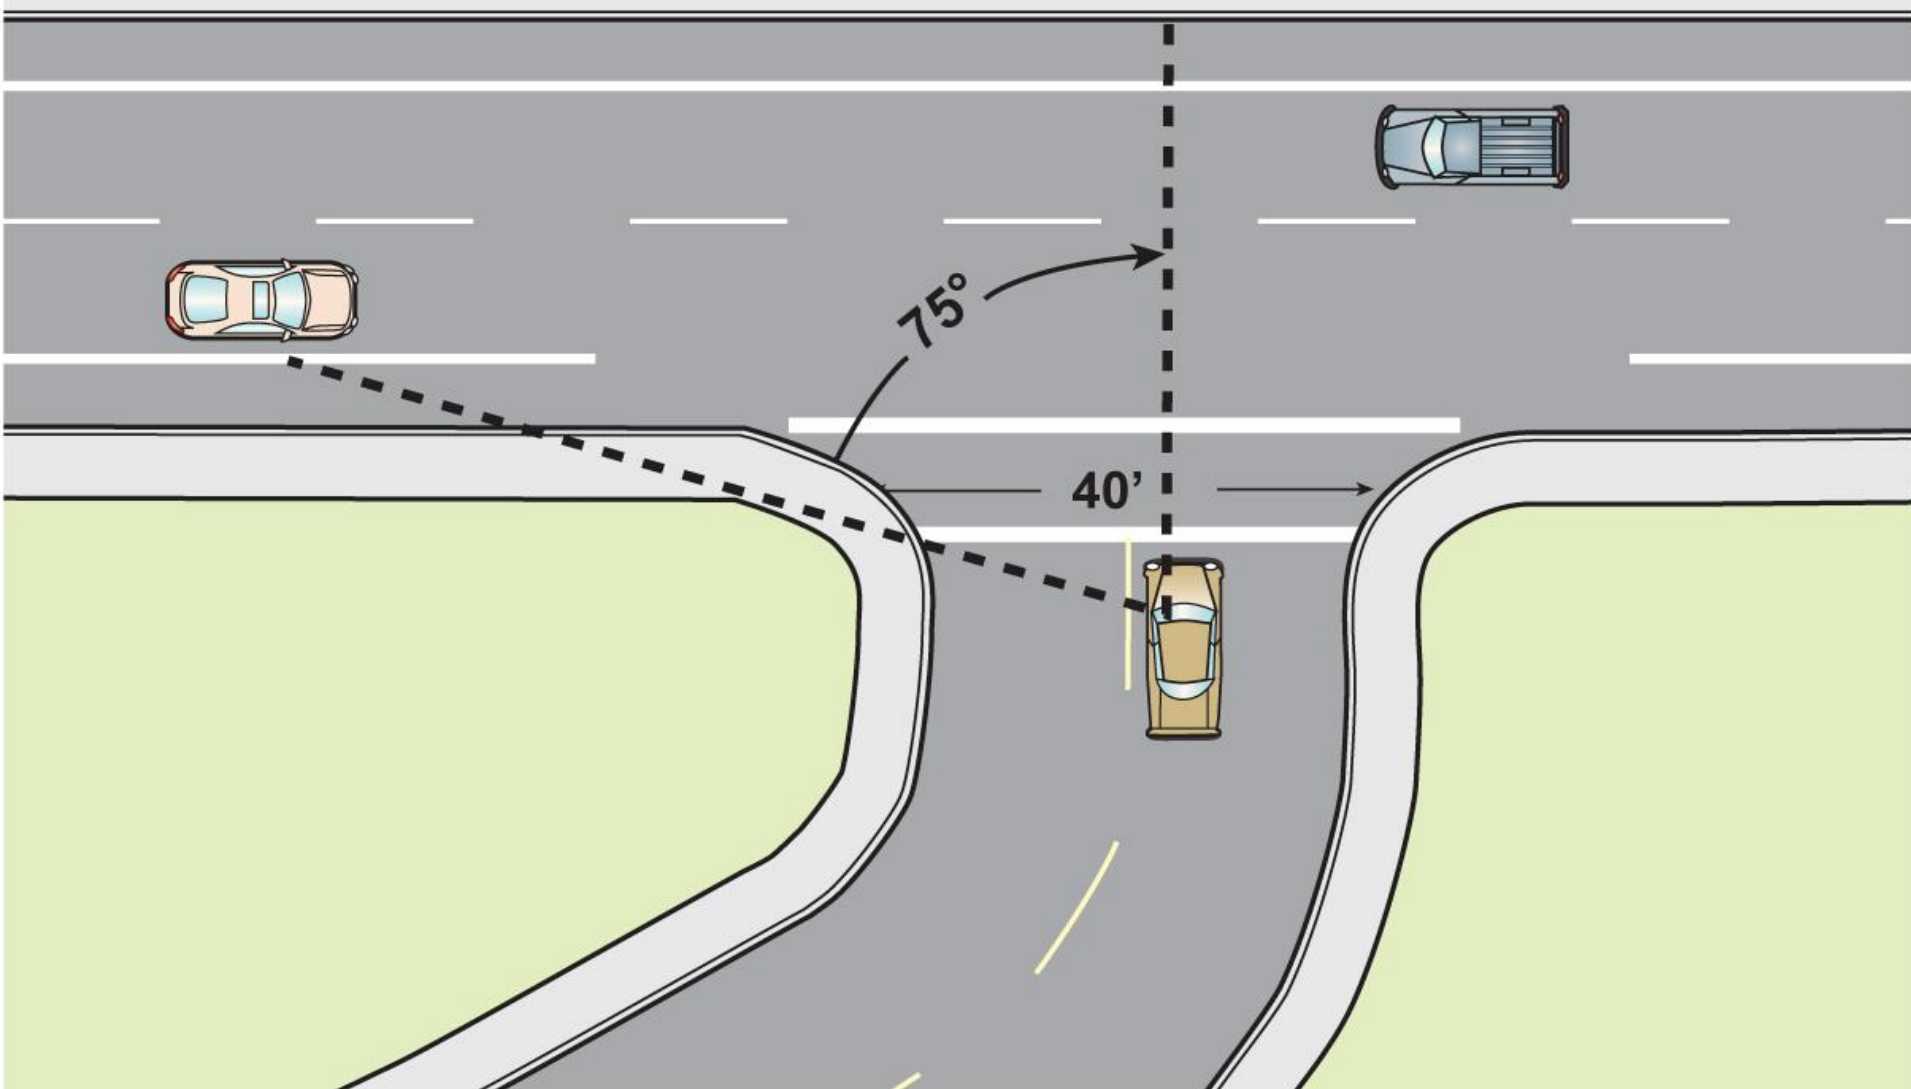

Right angle decreases crosswalk length, increases visibility



5-10

Bend OR

- ❑ Skewed intersection reduces visibility
- ❑ Driver looks left, doesn't see pedestrian on right



5-11

Bend OR

Adjust skew by bringing out curb

Designing for Pedestrian Safety – Intersection Geometry



5-12


Bend OR

Result: driver behavior change

Curb radius – small radii are safer for pedestrians

5-13


- Large radii:
- Increase crossing distance and
- Make crosswalk & ramp placement more difficult

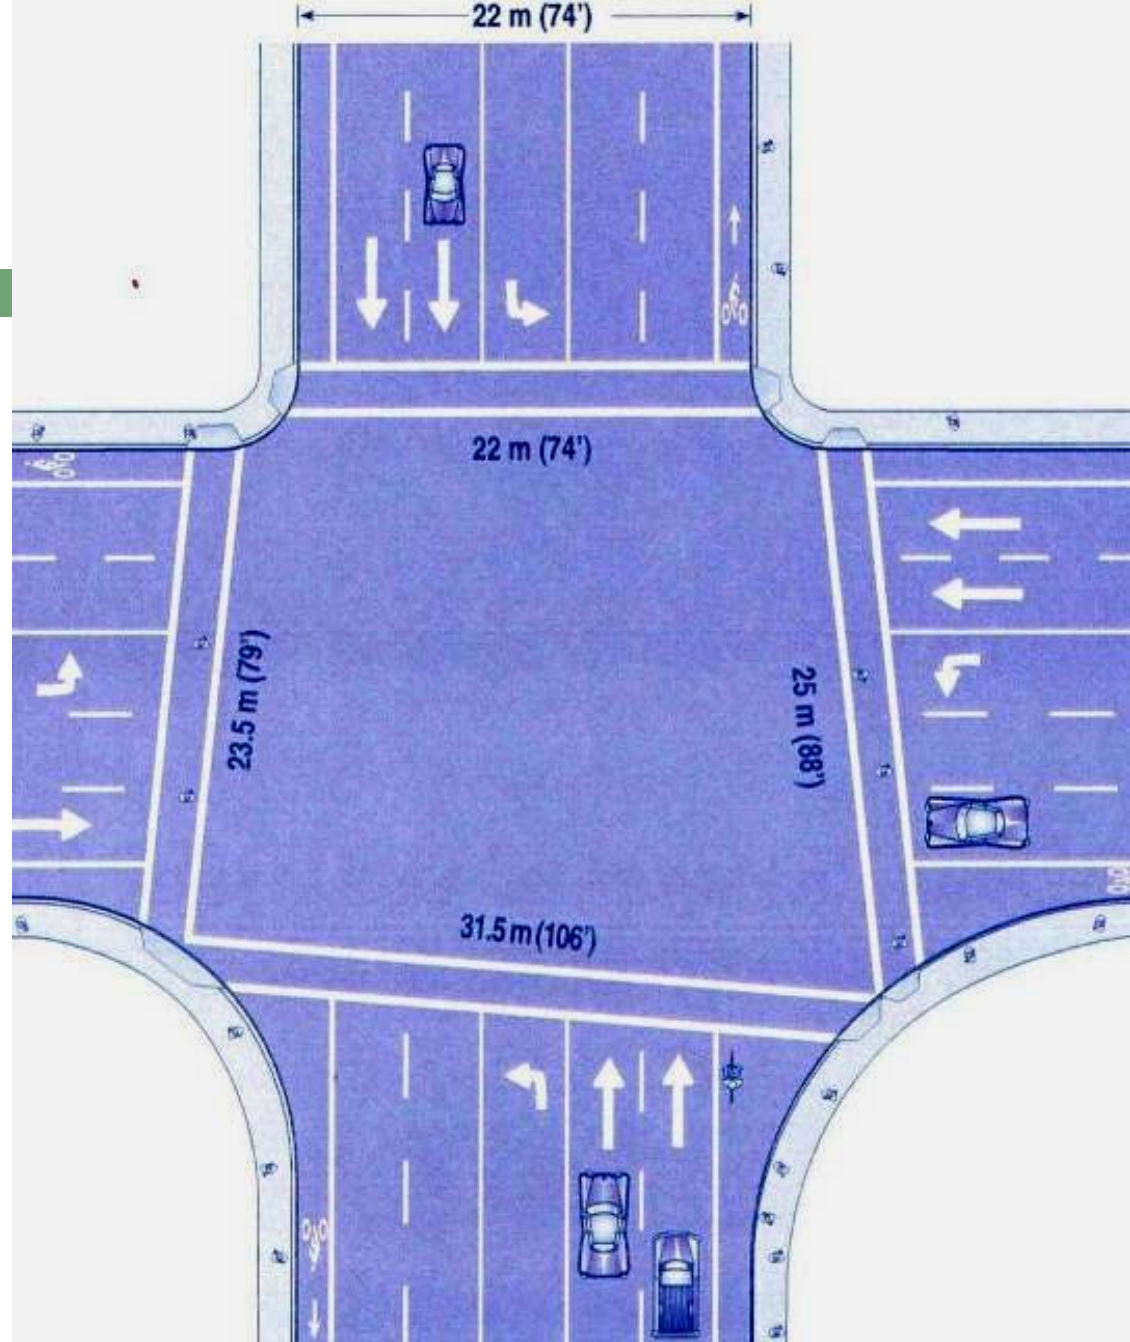

Effect of large radius on crosswalk:

5-14

Bend OR

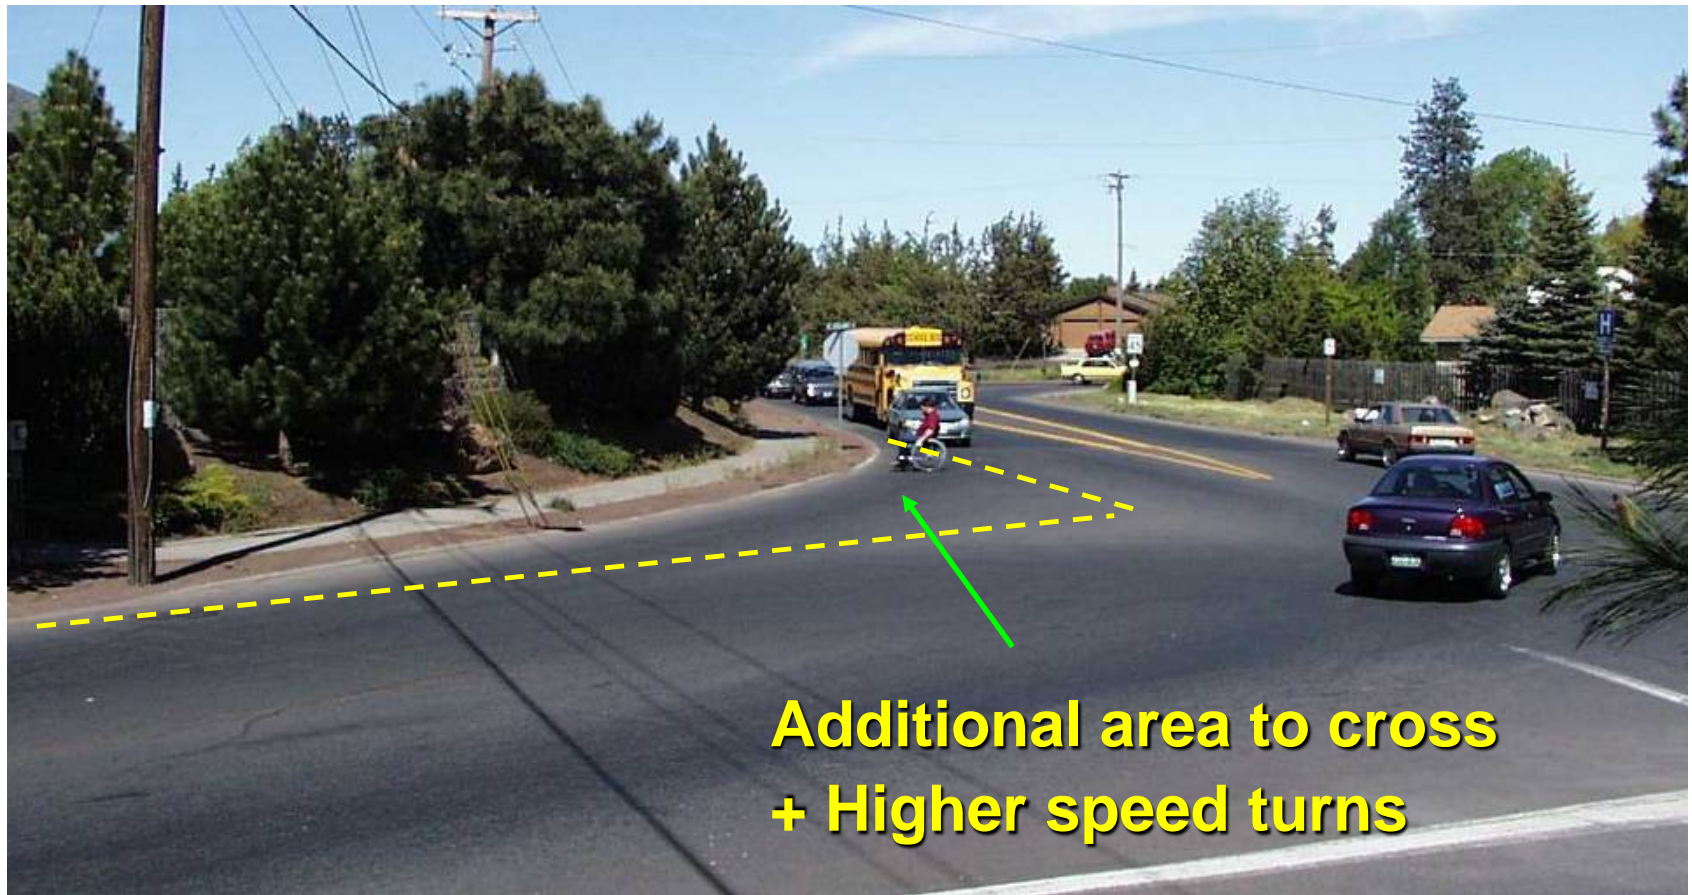


It adds to crossing distance...

Effect of large radius on crosswalk:

5-15

Bend OR

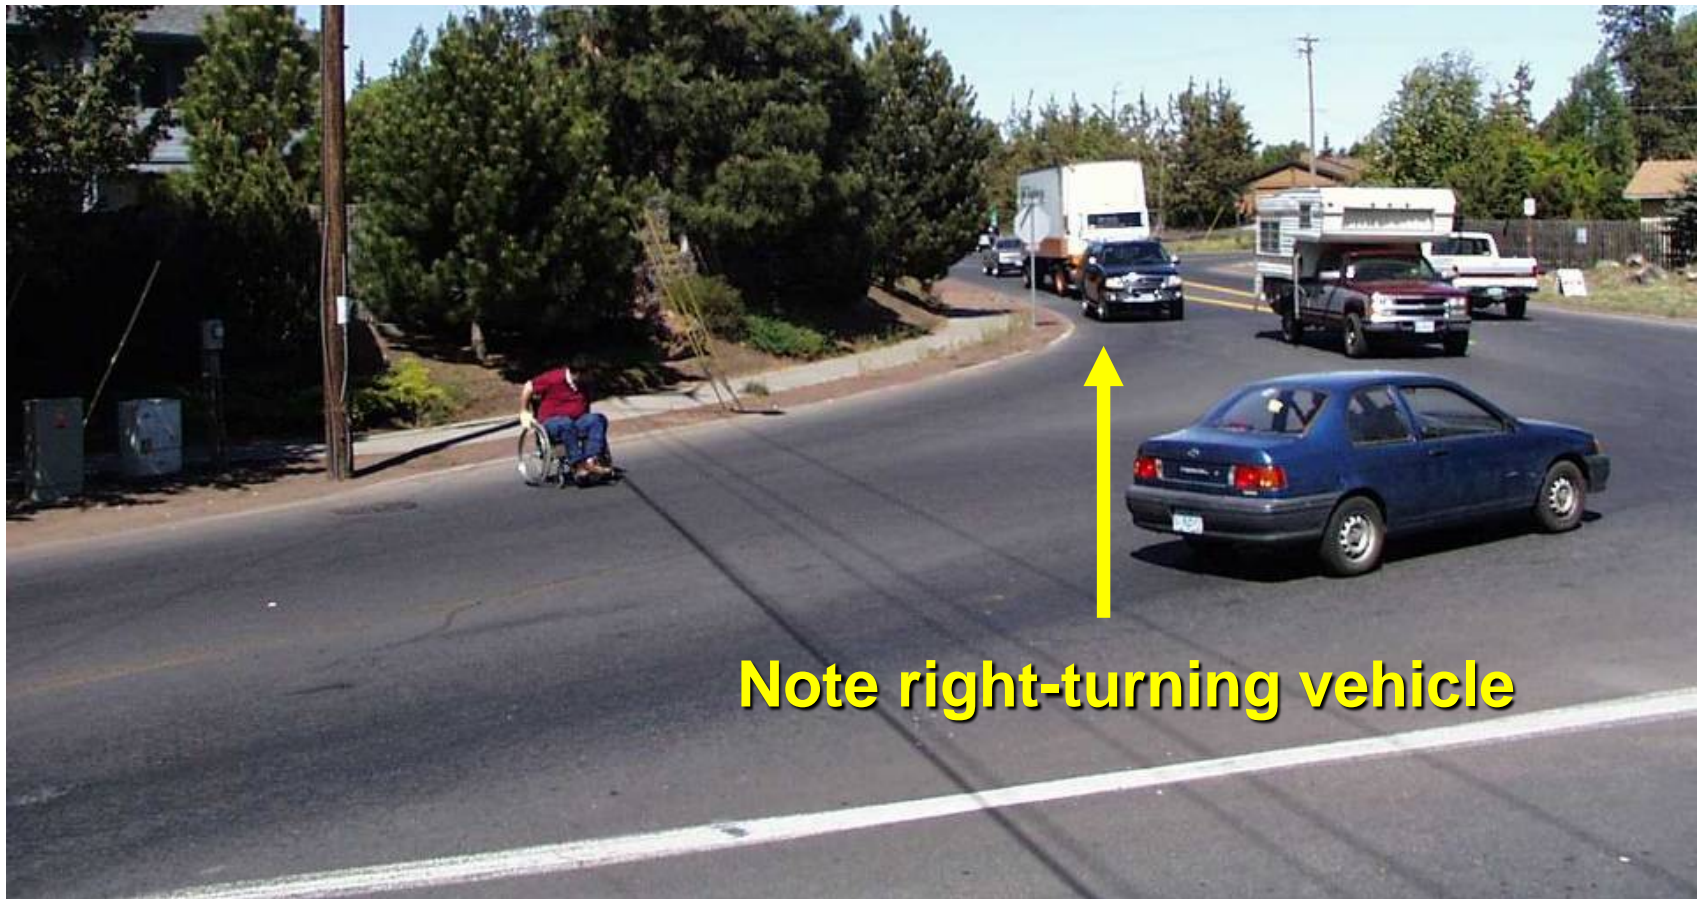

... and makes it hard to figure out where to cross

Effect of large radius on drivers

5-16

Tigard OR




They drive fast, ignoring pedestrians

Minimize curb radius

5-17


1. Calculate effective radius: Larger than built radius if travel lanes offset from curb with parking and/or bike lane

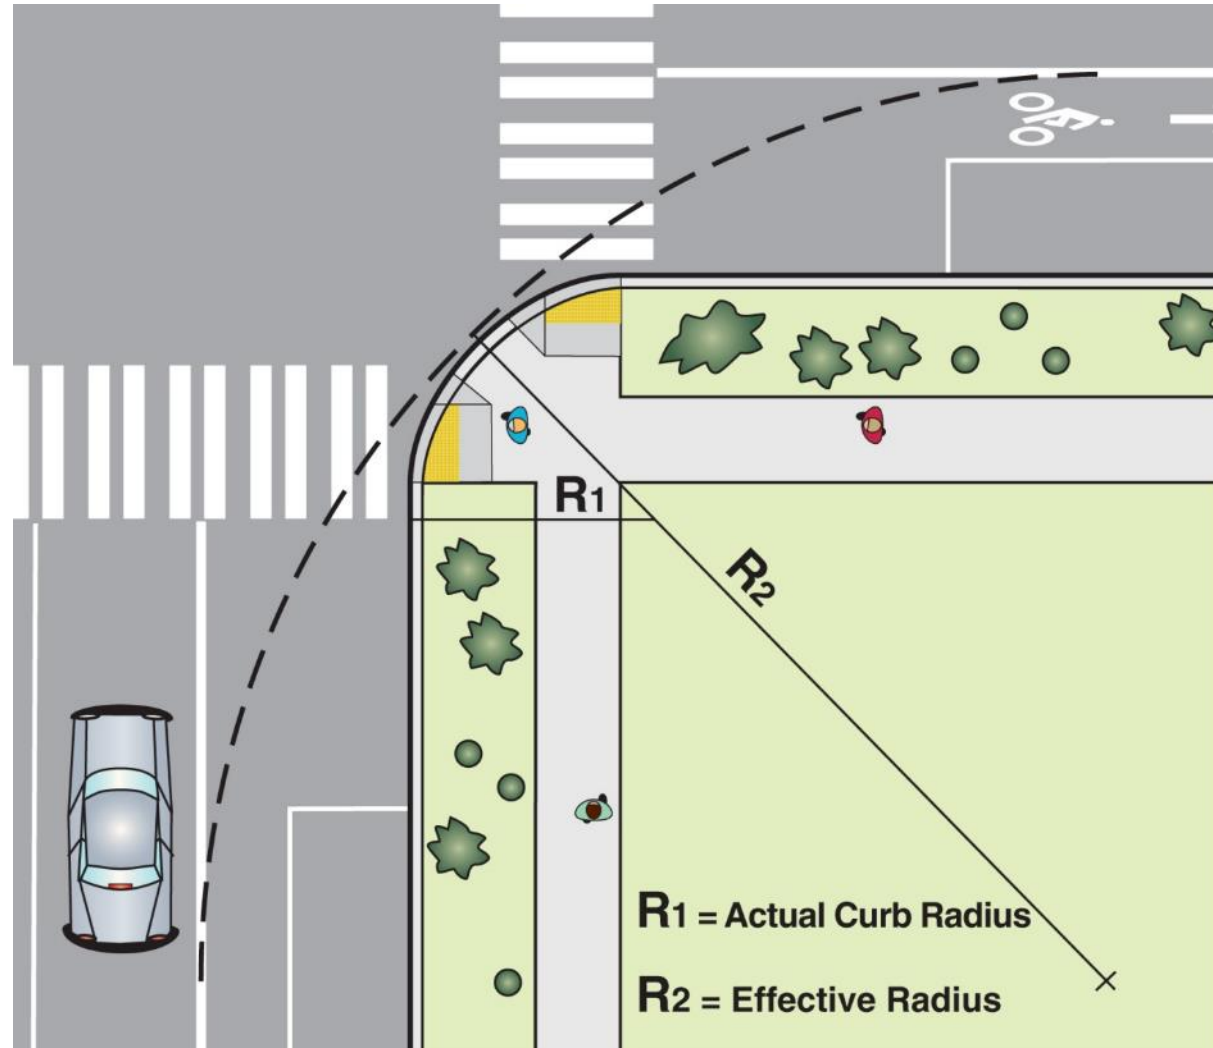

Minimize curb radius

5-18

2. At one-way streets, corner with no turns can have tight radius

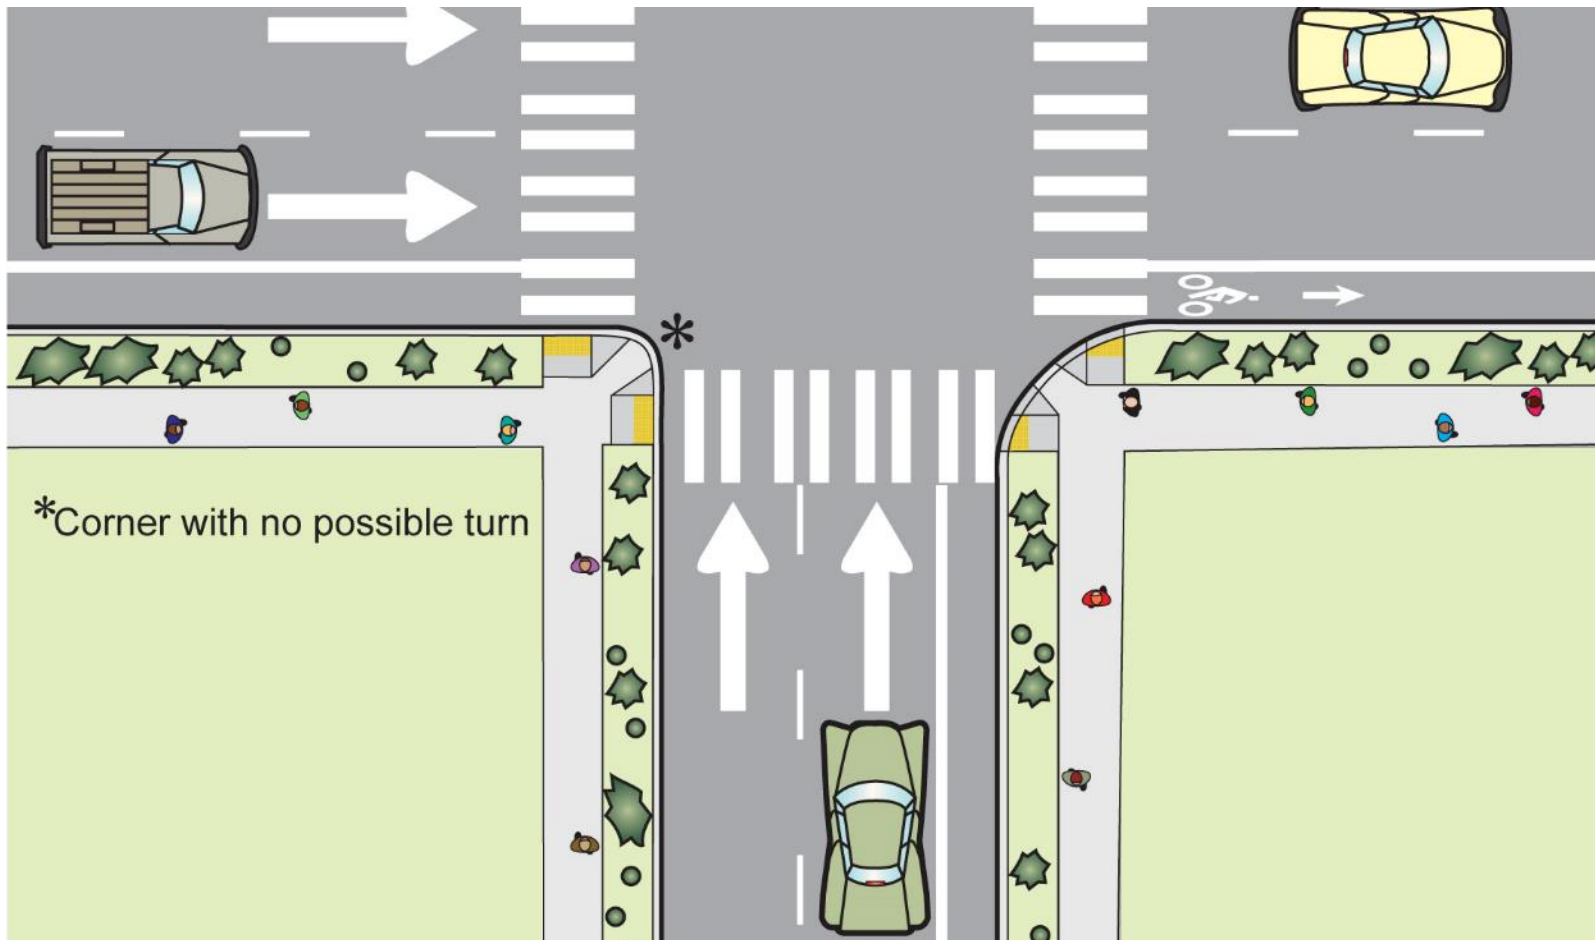

Minimize curb radius

5-19

Canyonville OR

3. Don't choose larger design vehicle than necessary



Bus makes turn several times an hour

Minimize curb radius

5-20

Santa Barbara CA

3. Don't choose larger design vehicle than necessary




Moving van, once or twice a year; peds cross every day

Minimize curb radius

5-21

4. Where appropriate, let trucks use 2nd lane

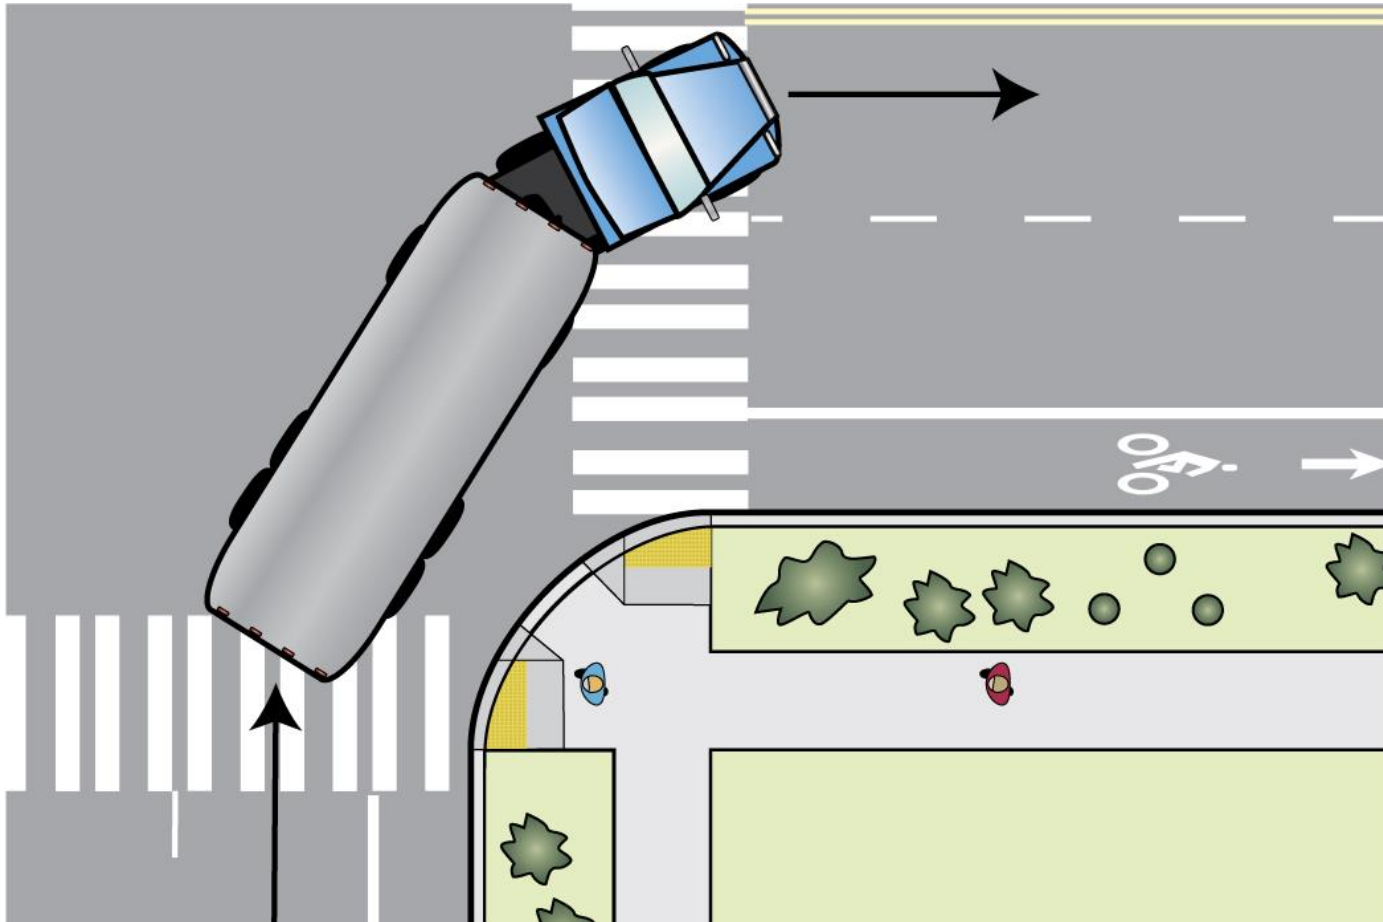

Minimize curb radius

5-22

Canyonville OR

5. Trucks can make very tight turns at slow speeds



5-23

5-24

5-24



Minimize Curb Radius w/Truck Apron

5-25


Bend OR




Minimize Curb Radius w/Truck Apron

5-26

Charlotte NC

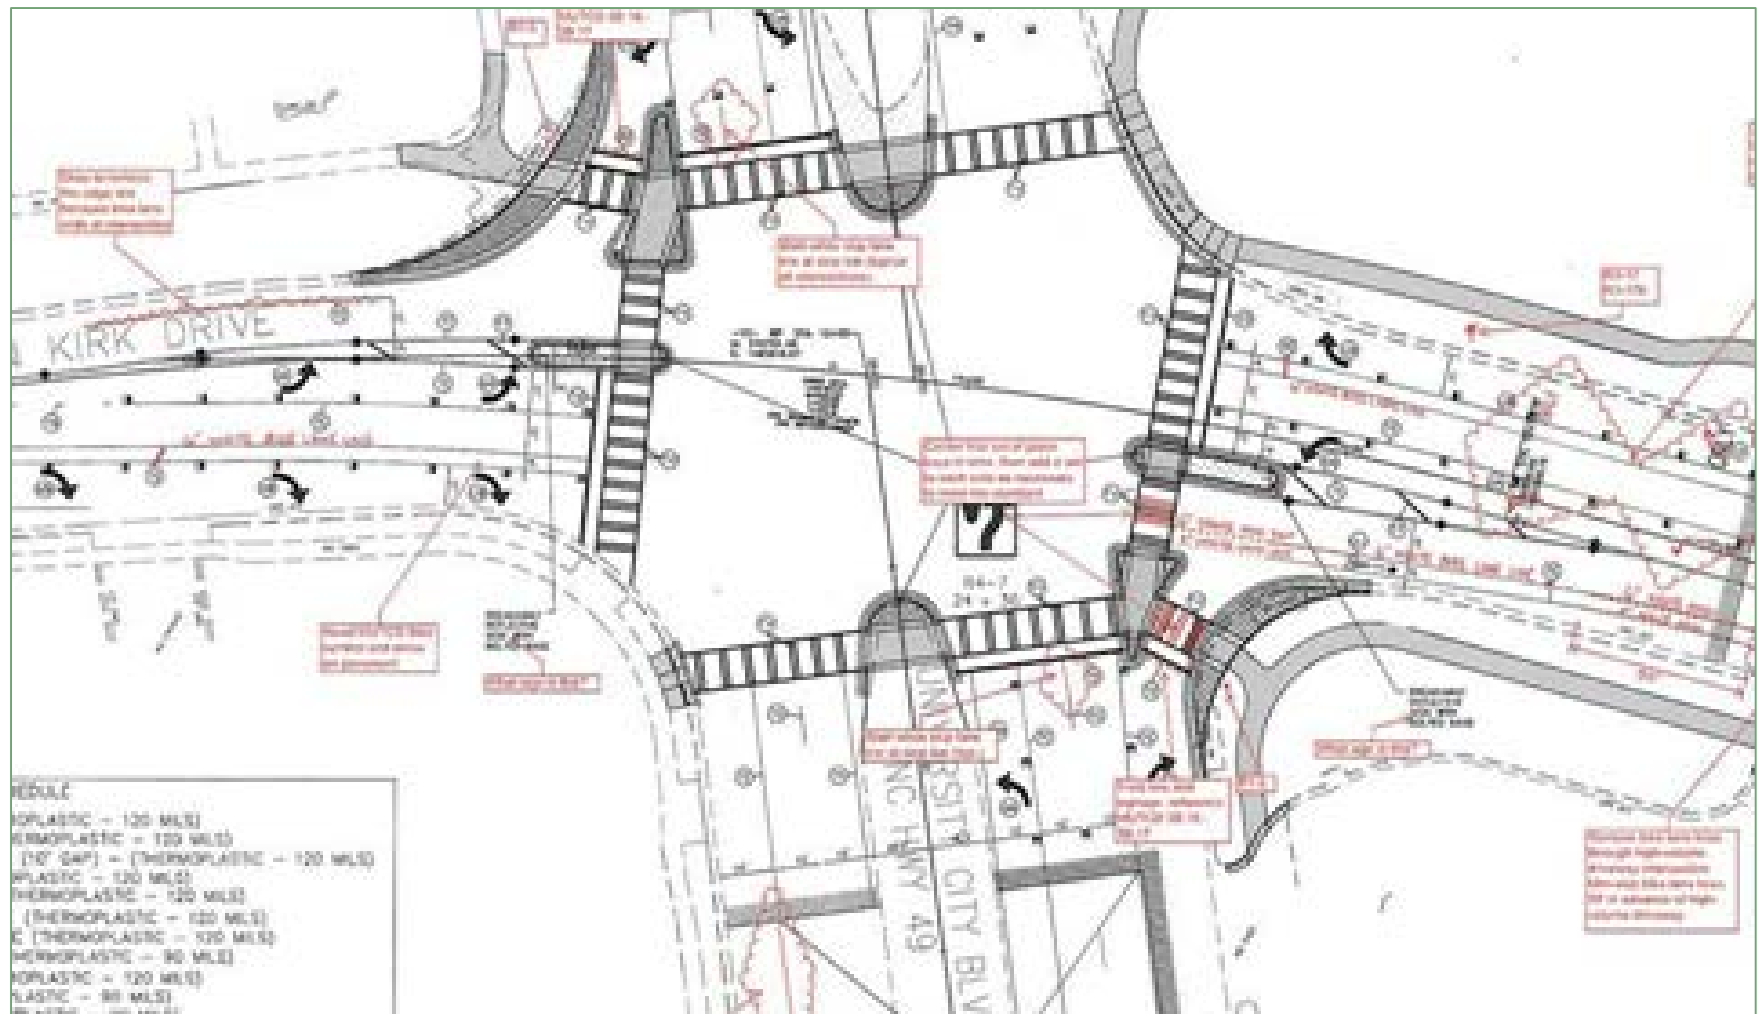

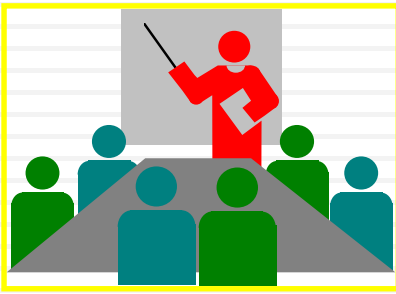

5-27

Discussion:

What are your policies & practices regarding corner radii?


Curb extensions

Most focus is on reduced crossing distance

Other advantages


- Better visibility between peds and motorists
- Traffic calming
- Room for street furniture

Curb extensions should be the width of the parking lane and not encroach on bike lanes or travel lanes

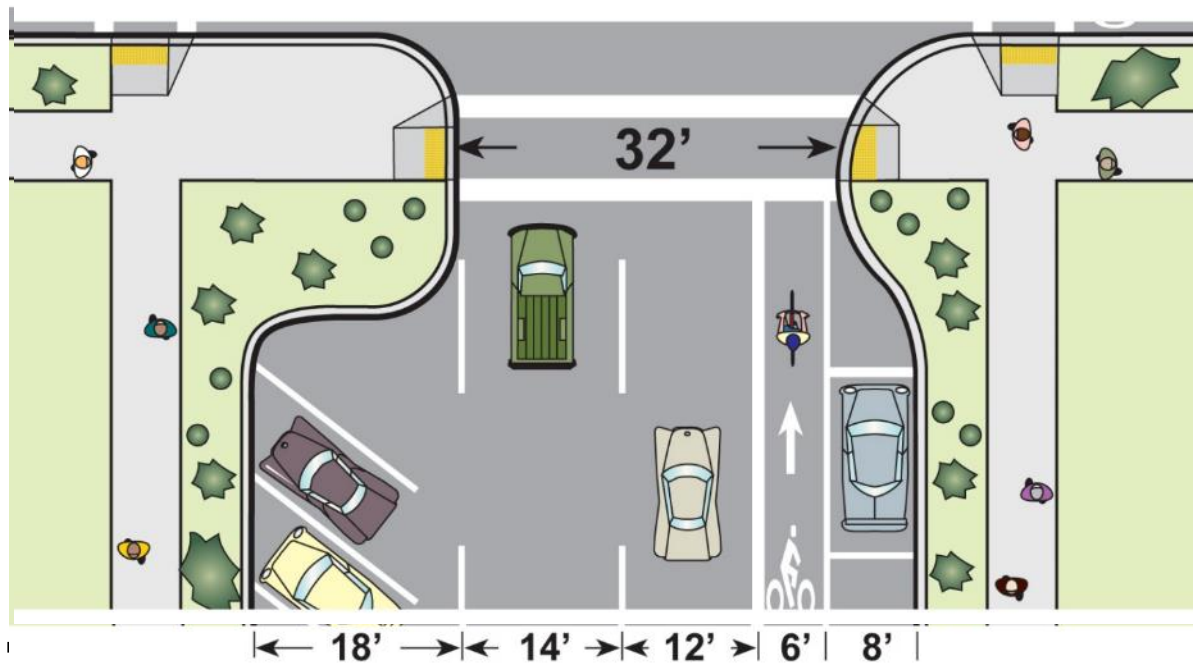

Better Visibility

5-29

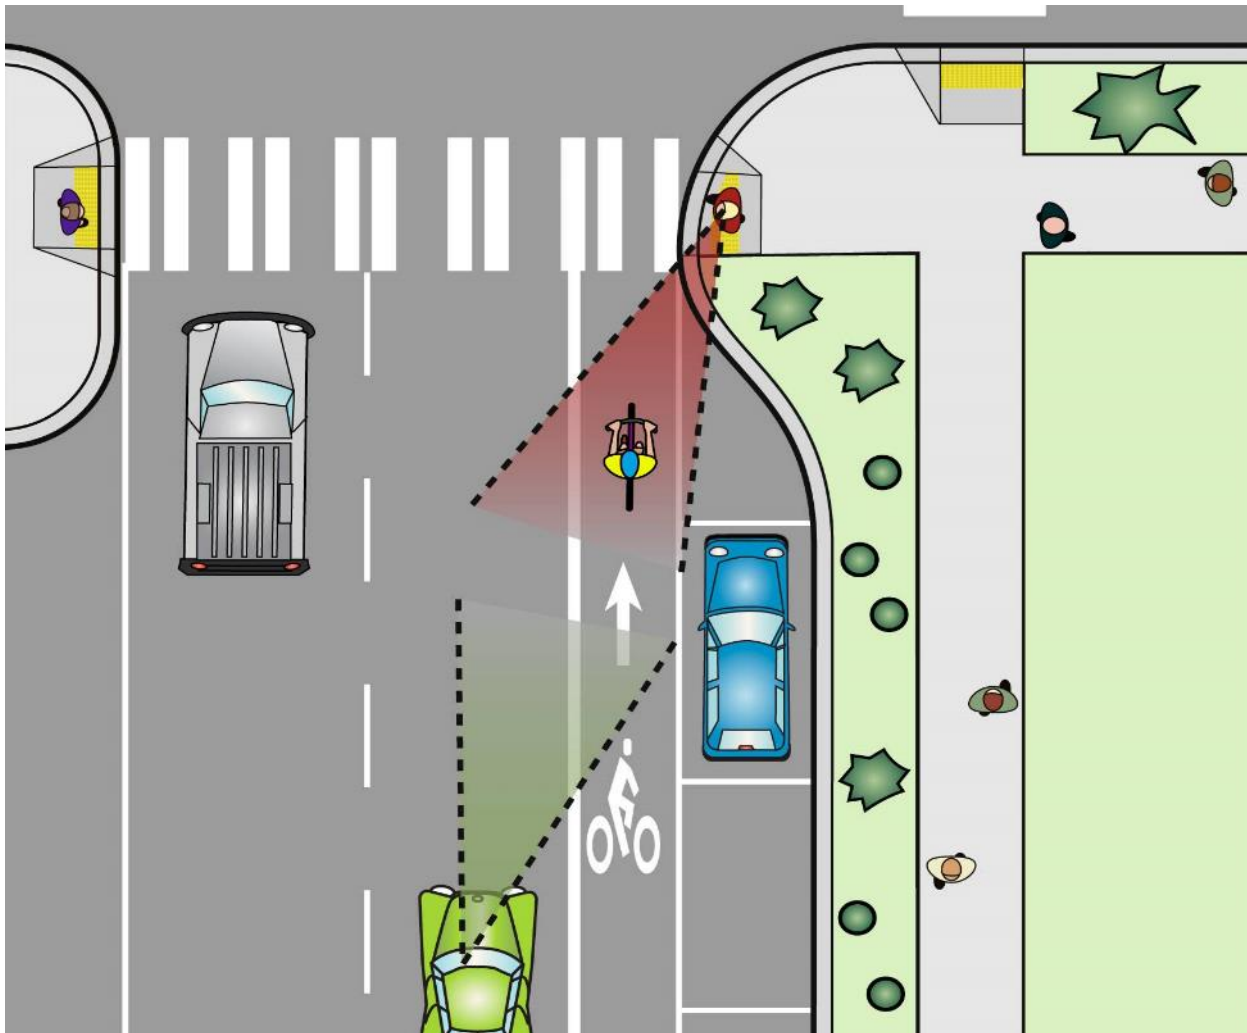




Pedestrians wait where they can see, in front of parked cars



Curb ext. places pedestrian where he can see and be seen

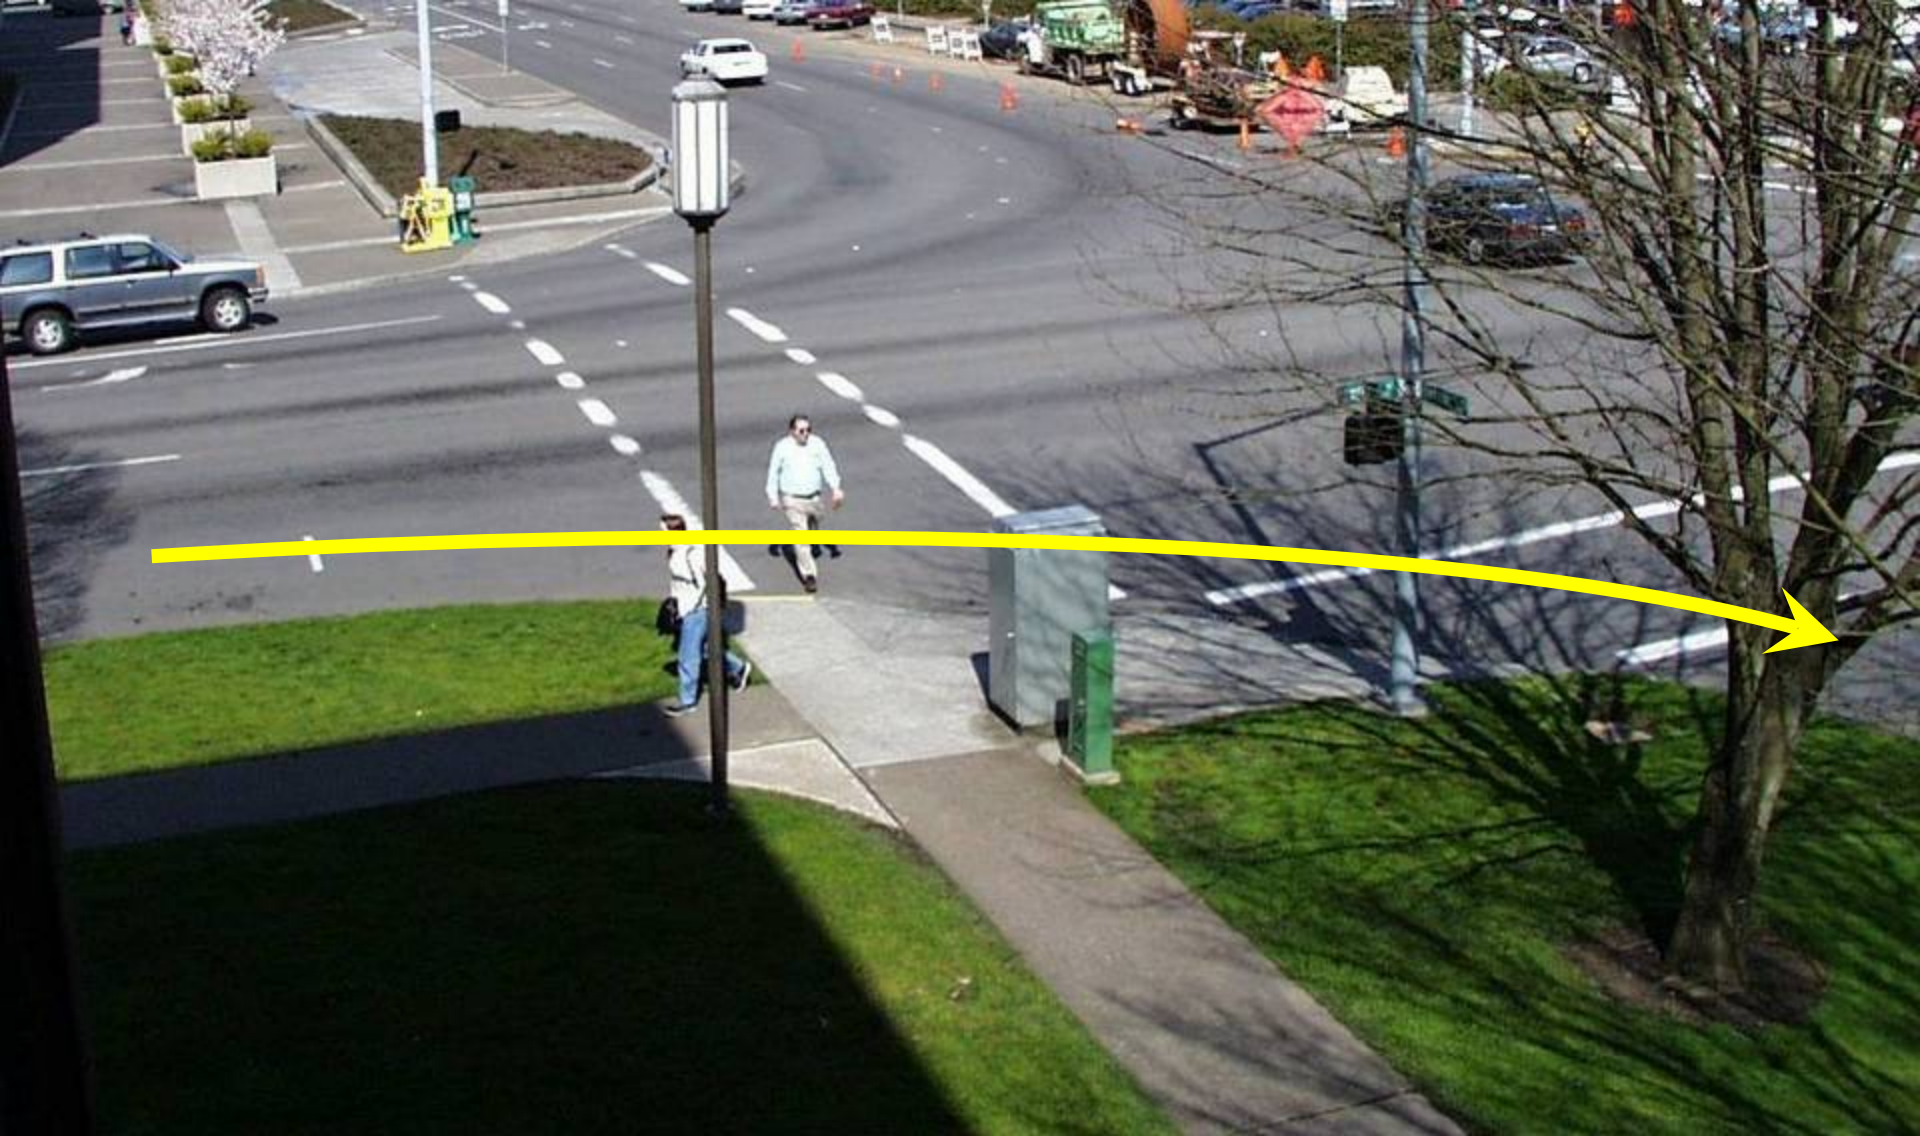

5-31

Salem OR

Before: high speed right-turns

Designing for Pedestrian Safety – Intersection Geometry



After: slow speed right-turns

5-32

Salem OR

- Curb extension and new corner radius must be designed together – see earlier radius discussion



5-33

Joseph OR

Curb ext. increases likelihood drivers will yield to peds



Public art



Newspaper boxes



Bike parking



Street trees

- Curb extensions allow room for street furniture
- But use care not to block sight lines



5-35

Fredericksburg VA

Curb extensions enable signs to be moved in

Designing for Pedestrian Safety – Intersection Geometry



5-36

Salem OR

Drainage solutions 1. Additional inlet

Designing for Pedestrian Safety – Intersection Geometry



5-37

Salem OR

Drainage solutions 2. Slotted drain

Designing for Pedestrian Safety – Intersection Geometry



5-38

Tucson AZ

Drainage solutions 3. Leave original curb + islands



5-39

Tucson AZ

Drainage solutions 4. Same as before, plus plate

Designing for Pedestrian Safety – Intersection Geometry

Curb Extension Integrated with the Sidewalk

5-40



“Parking pockets” in furniture zone have similar surface materials as the sidewalk



5-41

Lake Oswego OR

Before: road looks and feels wide



5-42

Lake Oswego OR

After: curb extension integral to sidewalk
Street looks narrow even with no parked cars



5-43

Cornelius & Charlotte NC

More examples: curb extension integral to sidewalk


Reminder – crosswalks are provided:

1. To indicate to pedestrians where to cross
2. To indicate to drivers where to expect pedestrians

5-44

University Place WA




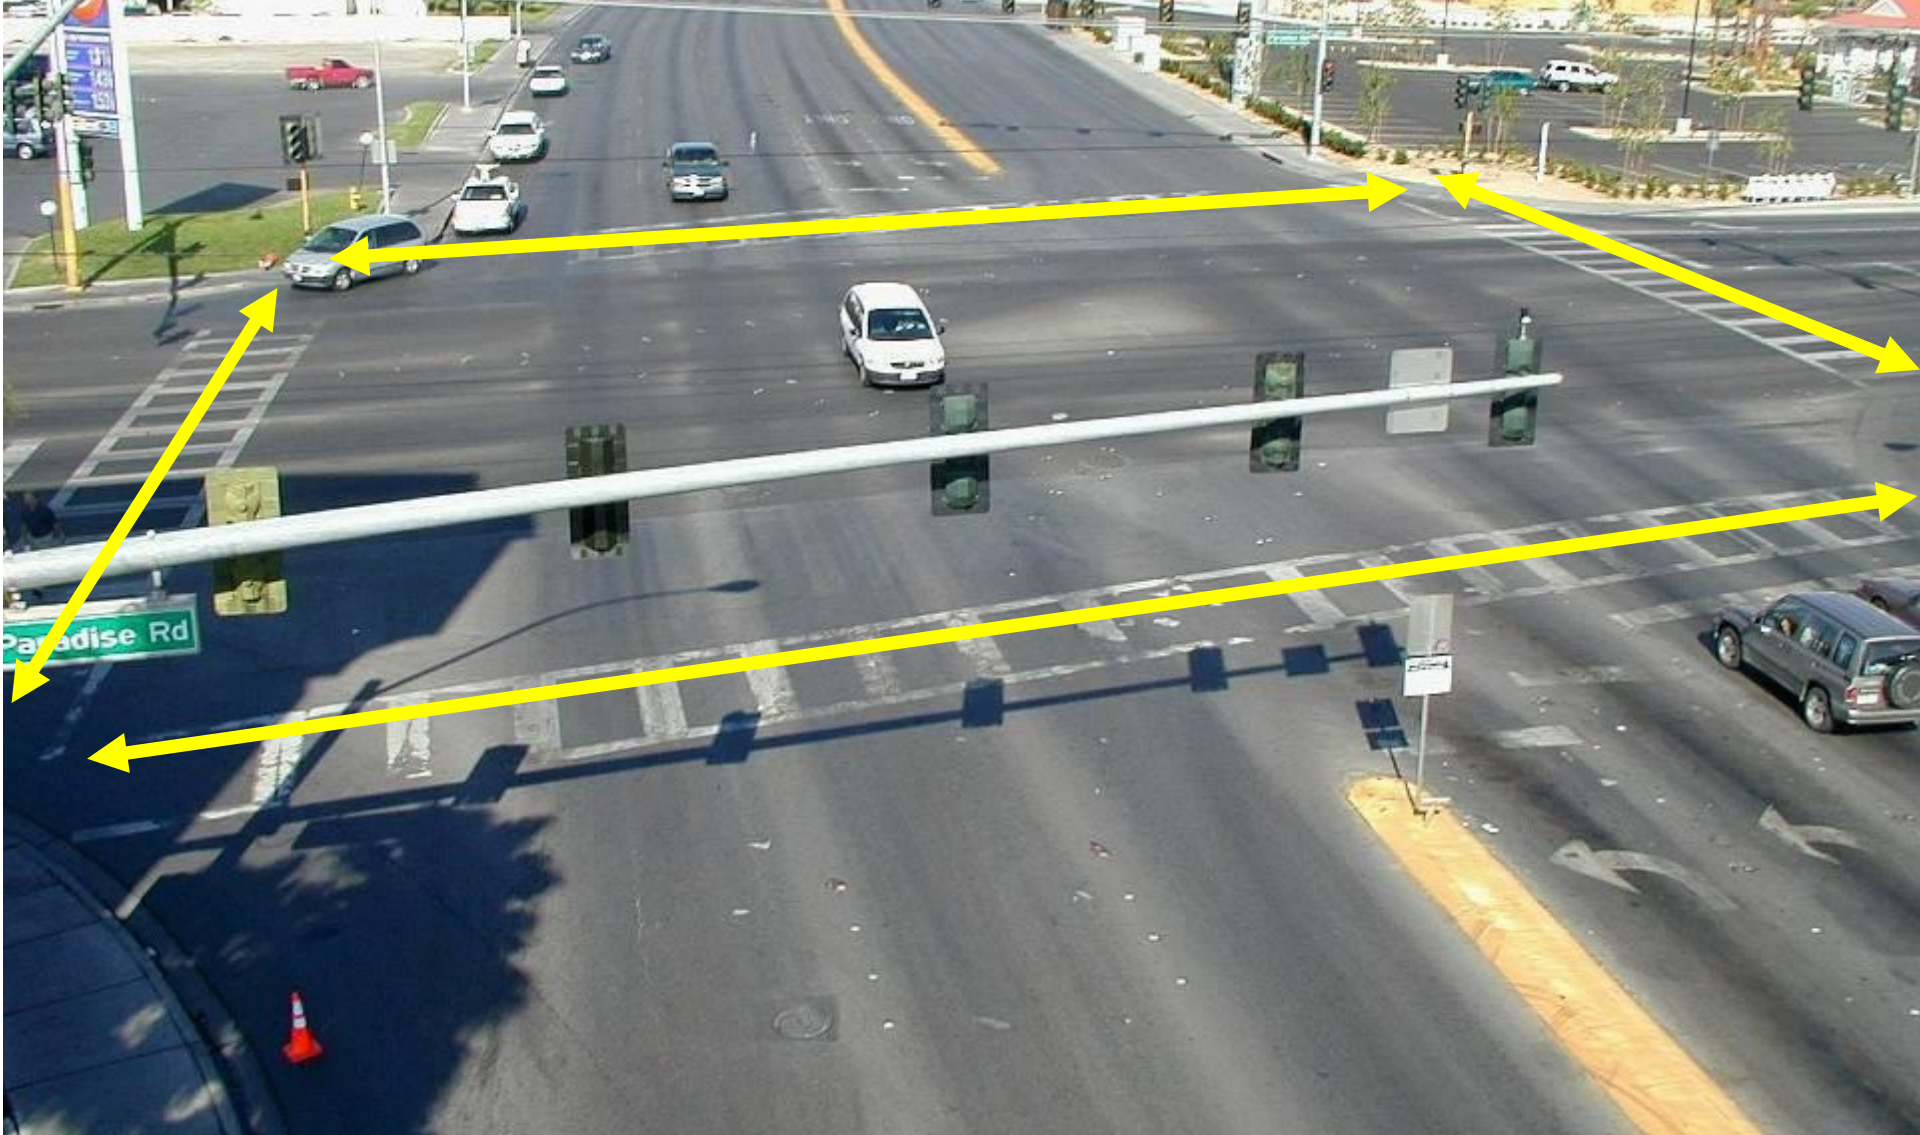

5-45

Las Vegas NV

Crosswalks should normally be placed on all legs of an intersection

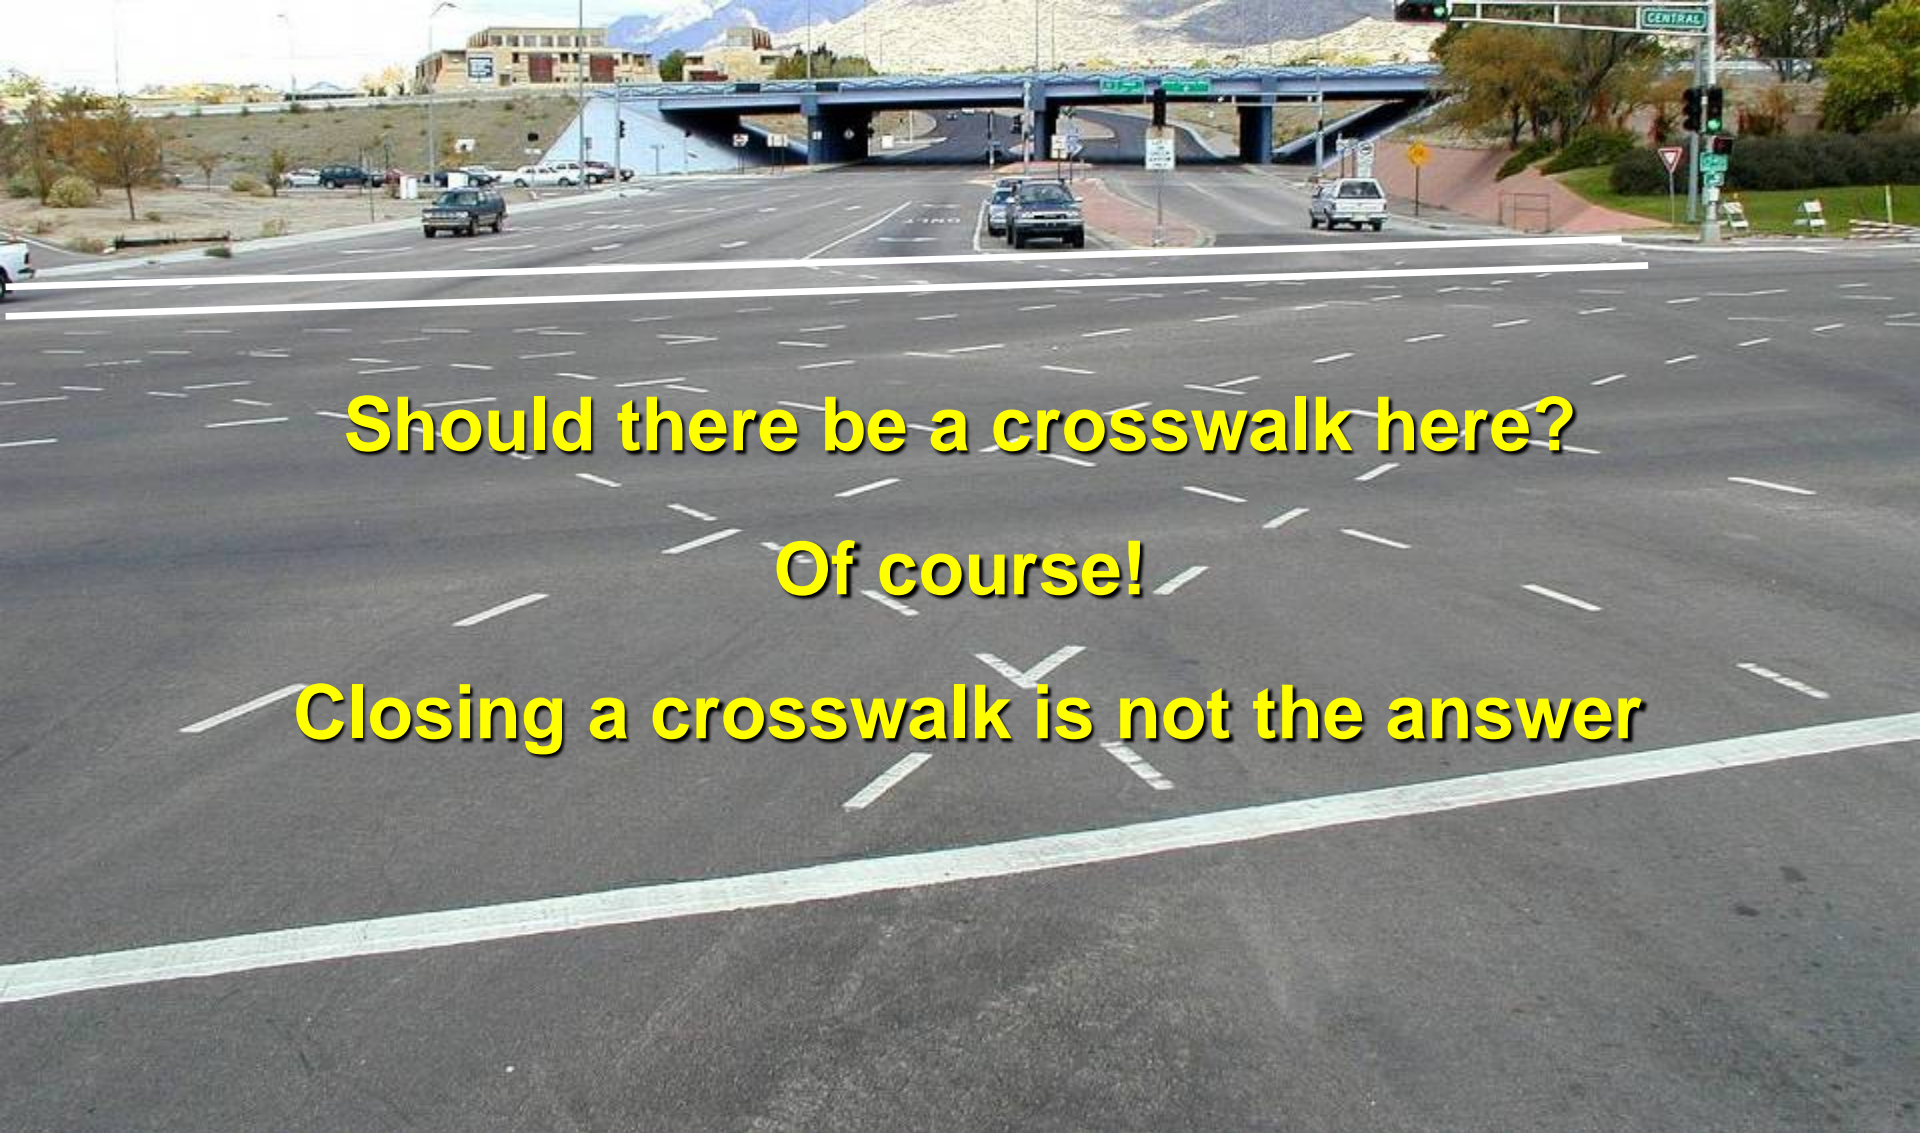

Large intersection is capacity driven, pedestrian unfriendly...



Here's what pedestrians are expected to do

Will she wait?


**Is crossing 15 lanes safer
than crossing 5 lanes?**

Crosswalk placement requires balancing several goals that sometimes compete:


5-48

- Shortest crosswalk length
- Minimal crosswalk setback to:
 - Reduce out-of-direction travel
 - Provide good sight lines between peds and motorists
- Proper ramp placement:
 - Ramps entirely contained in crosswalk
 - Two ramps preferred whenever possible

Small corner radii allow two ramps, shortest crosswalks, direct travel paths

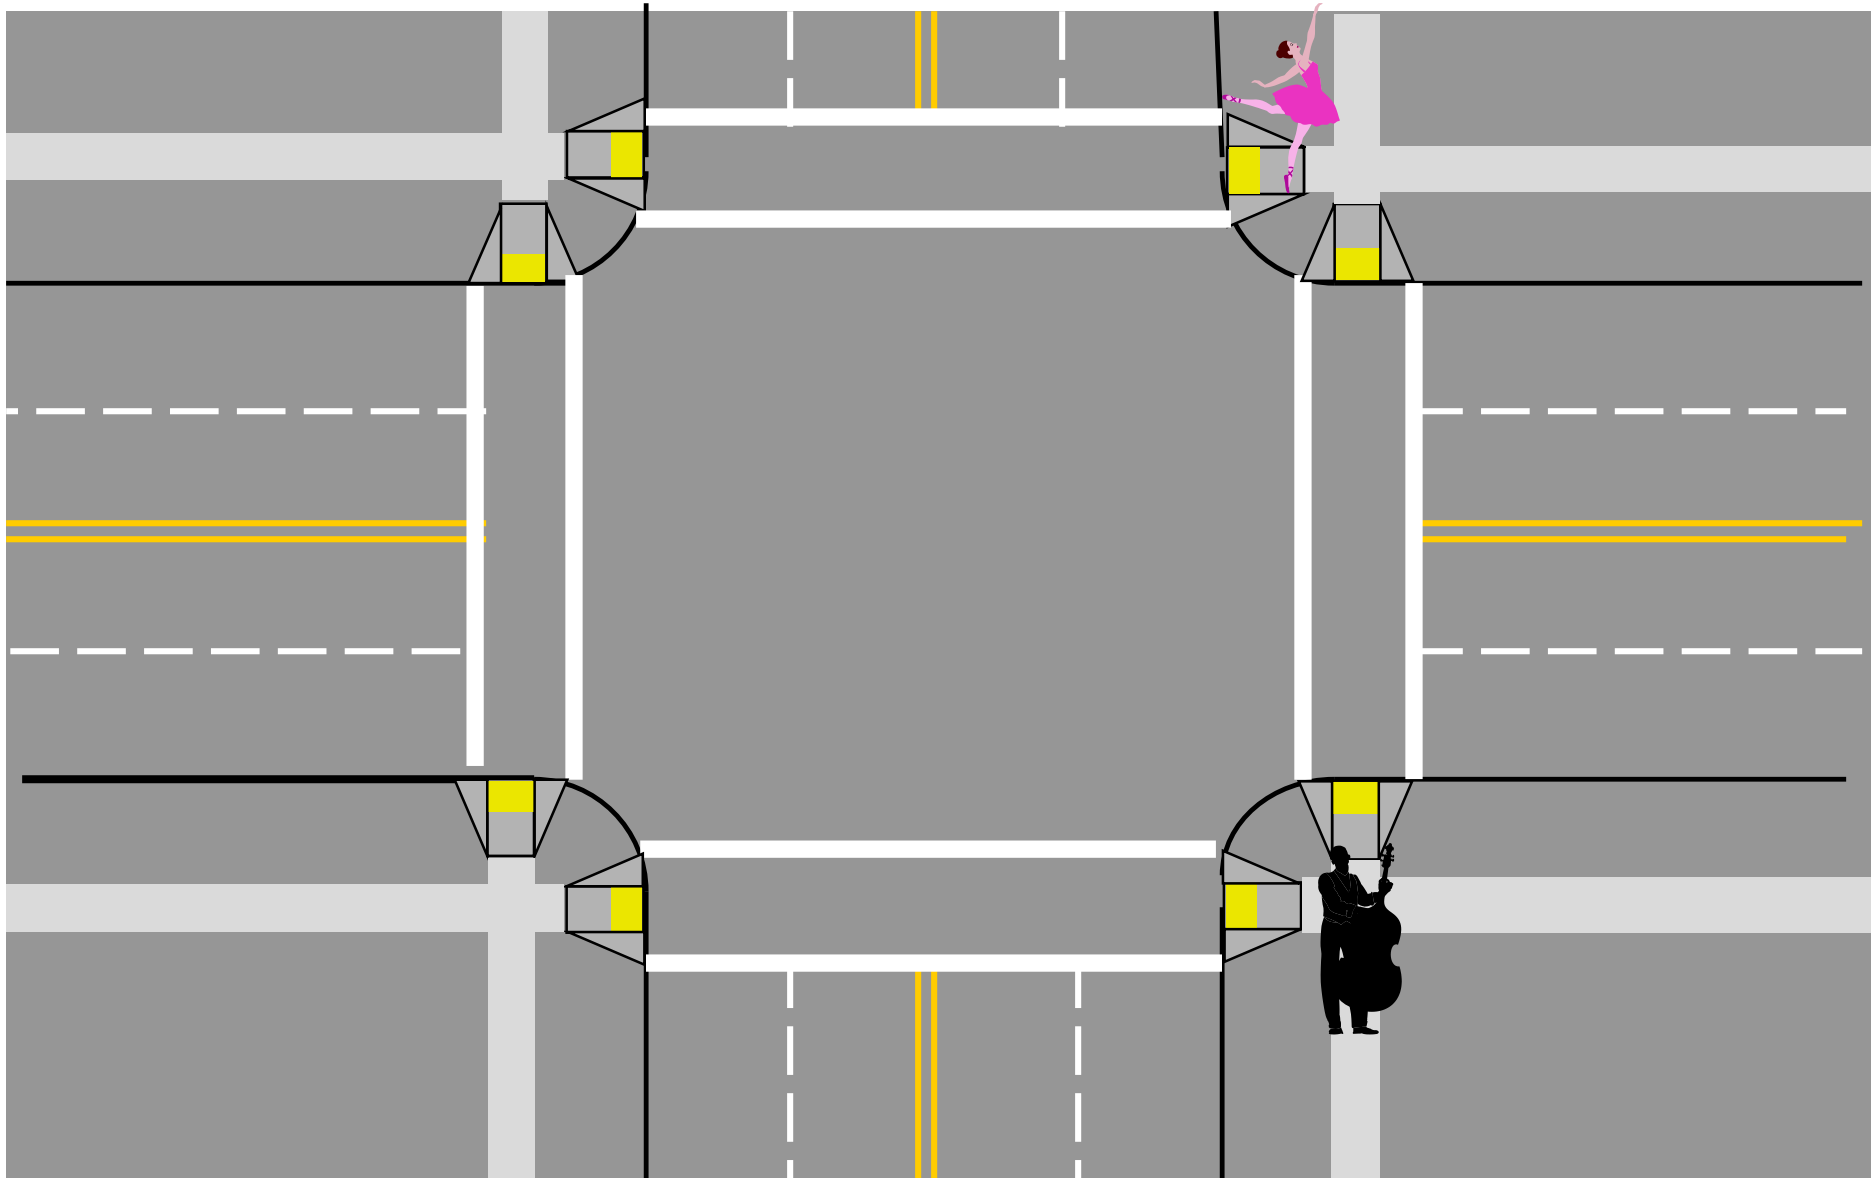


Larger radii create large undefined areas

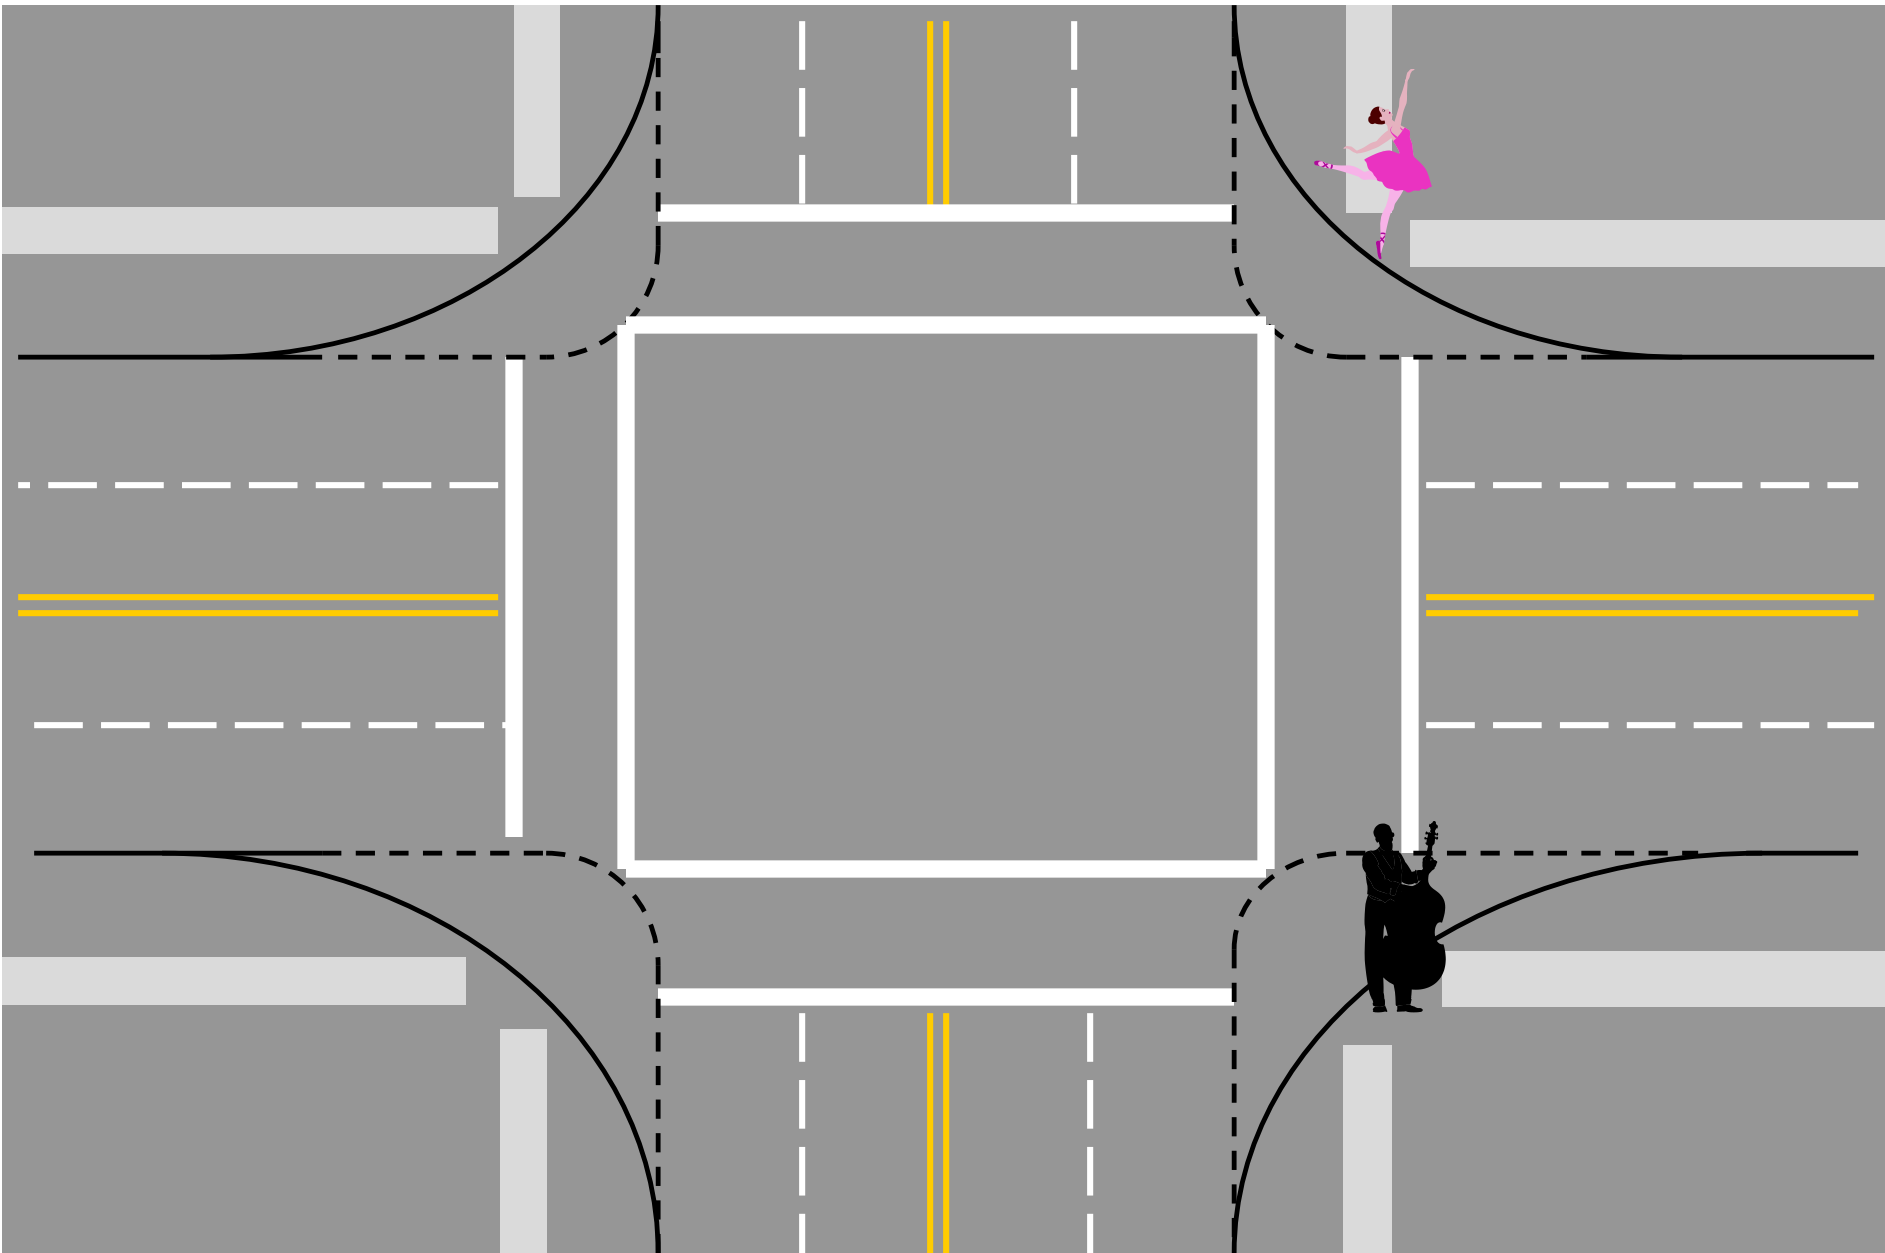


Crosswalks at shortest crossing = longer walking distance

Right & left-turning drivers don't see crosswalk

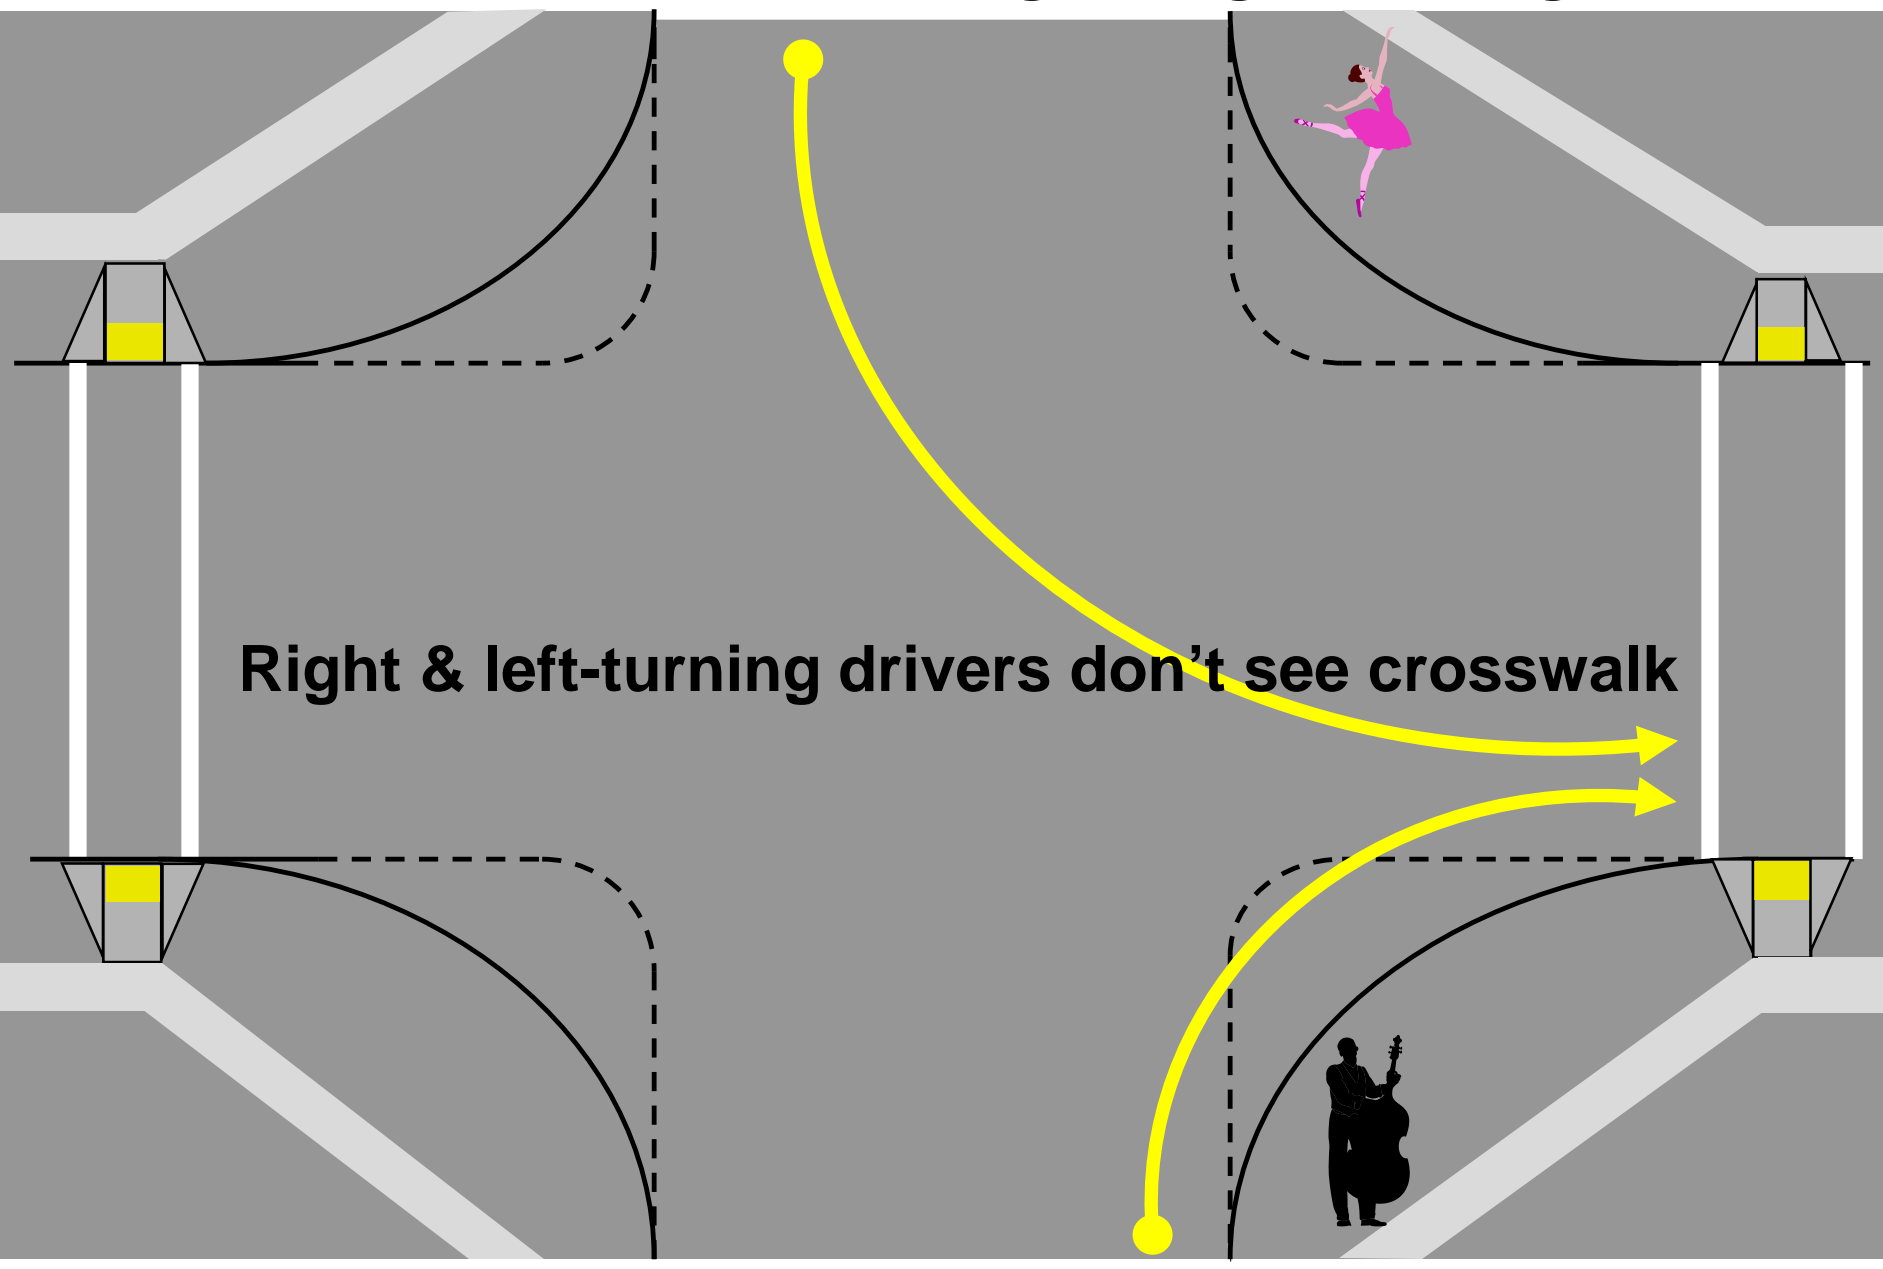


Single ramp reduces crosswalk setback but lengthens crosswalk

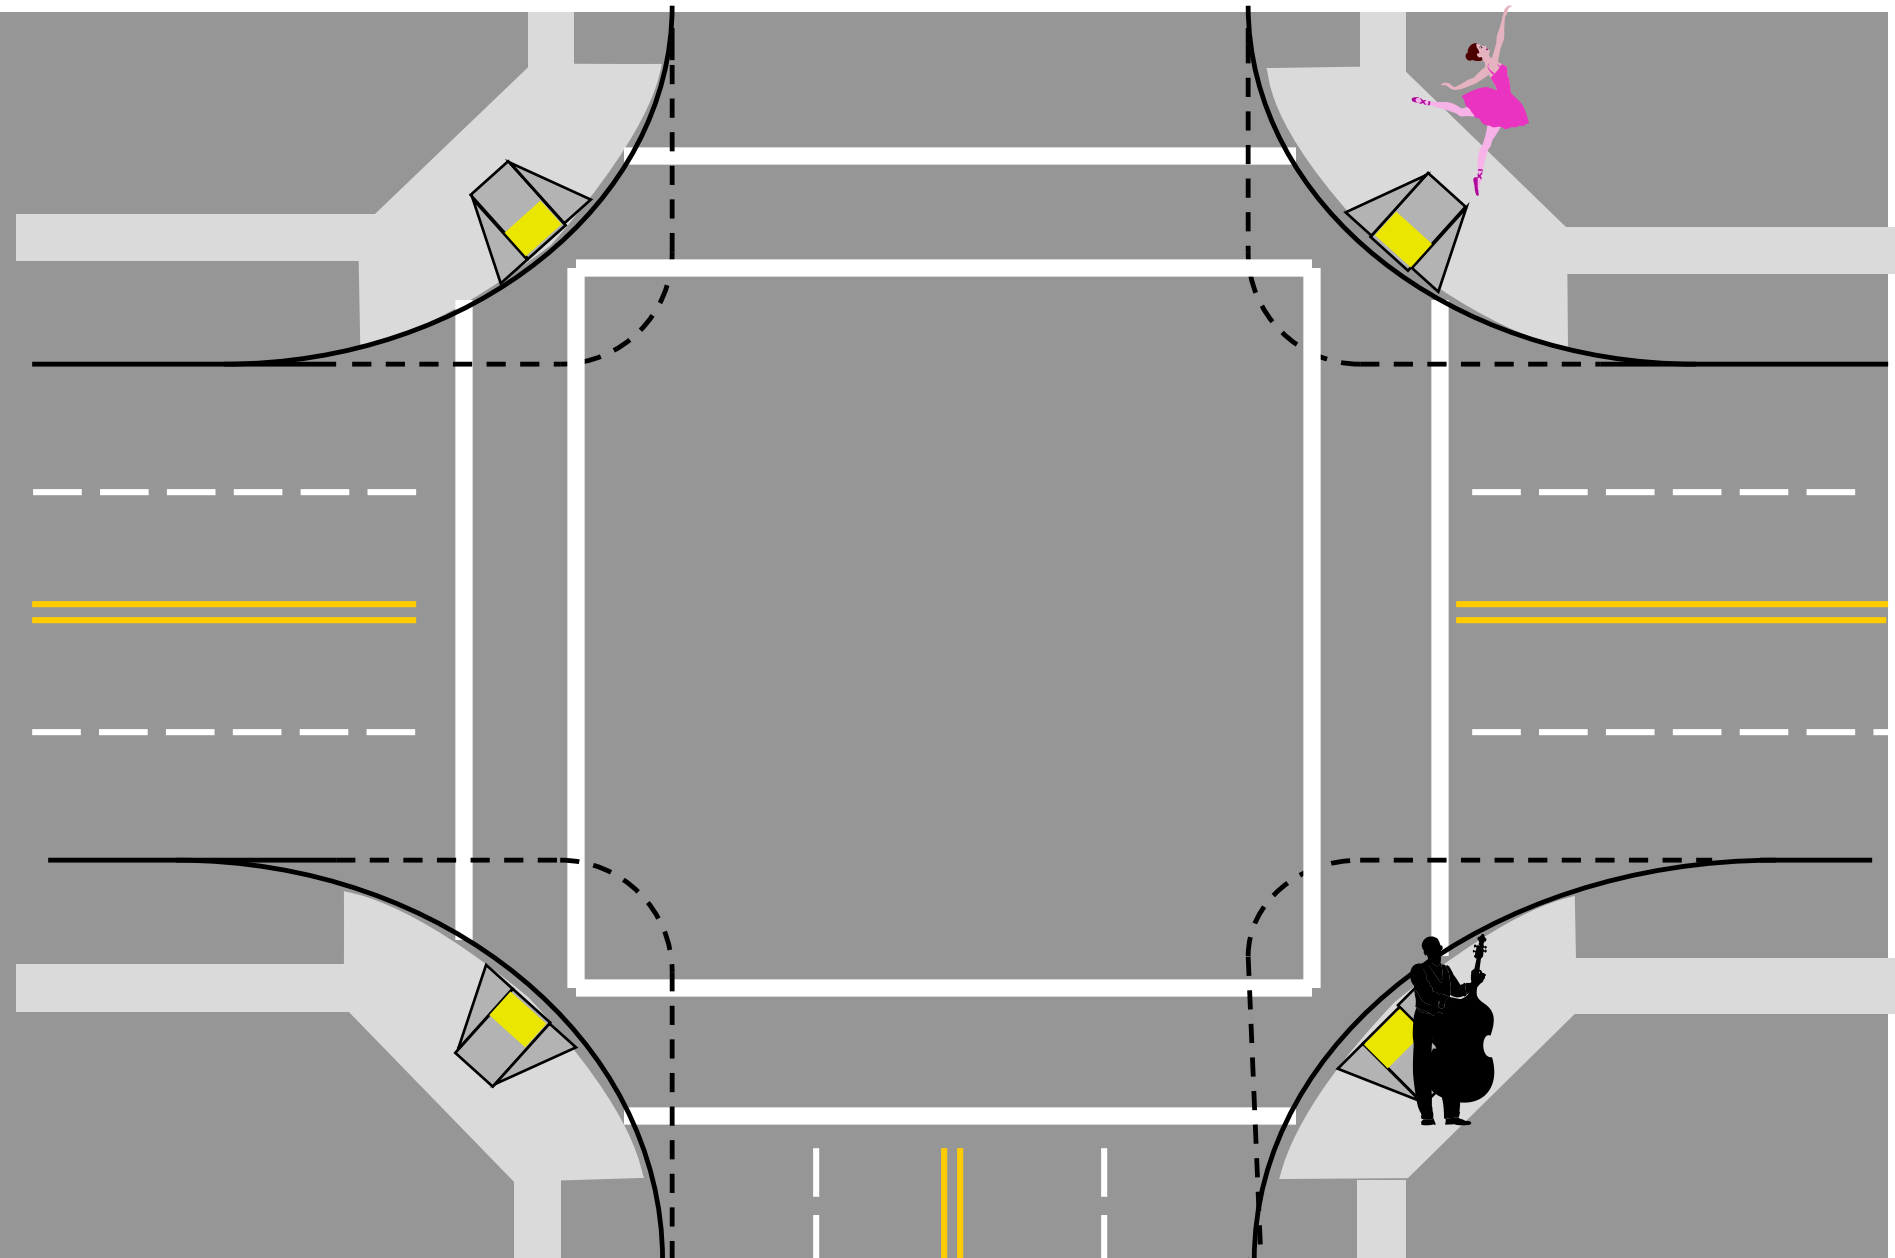

Balancing the goals works best

Note: 3" curb exposure between ramps allows them to be close together

Note:
Crosswalk length and setback are greater with large radii than with small radii

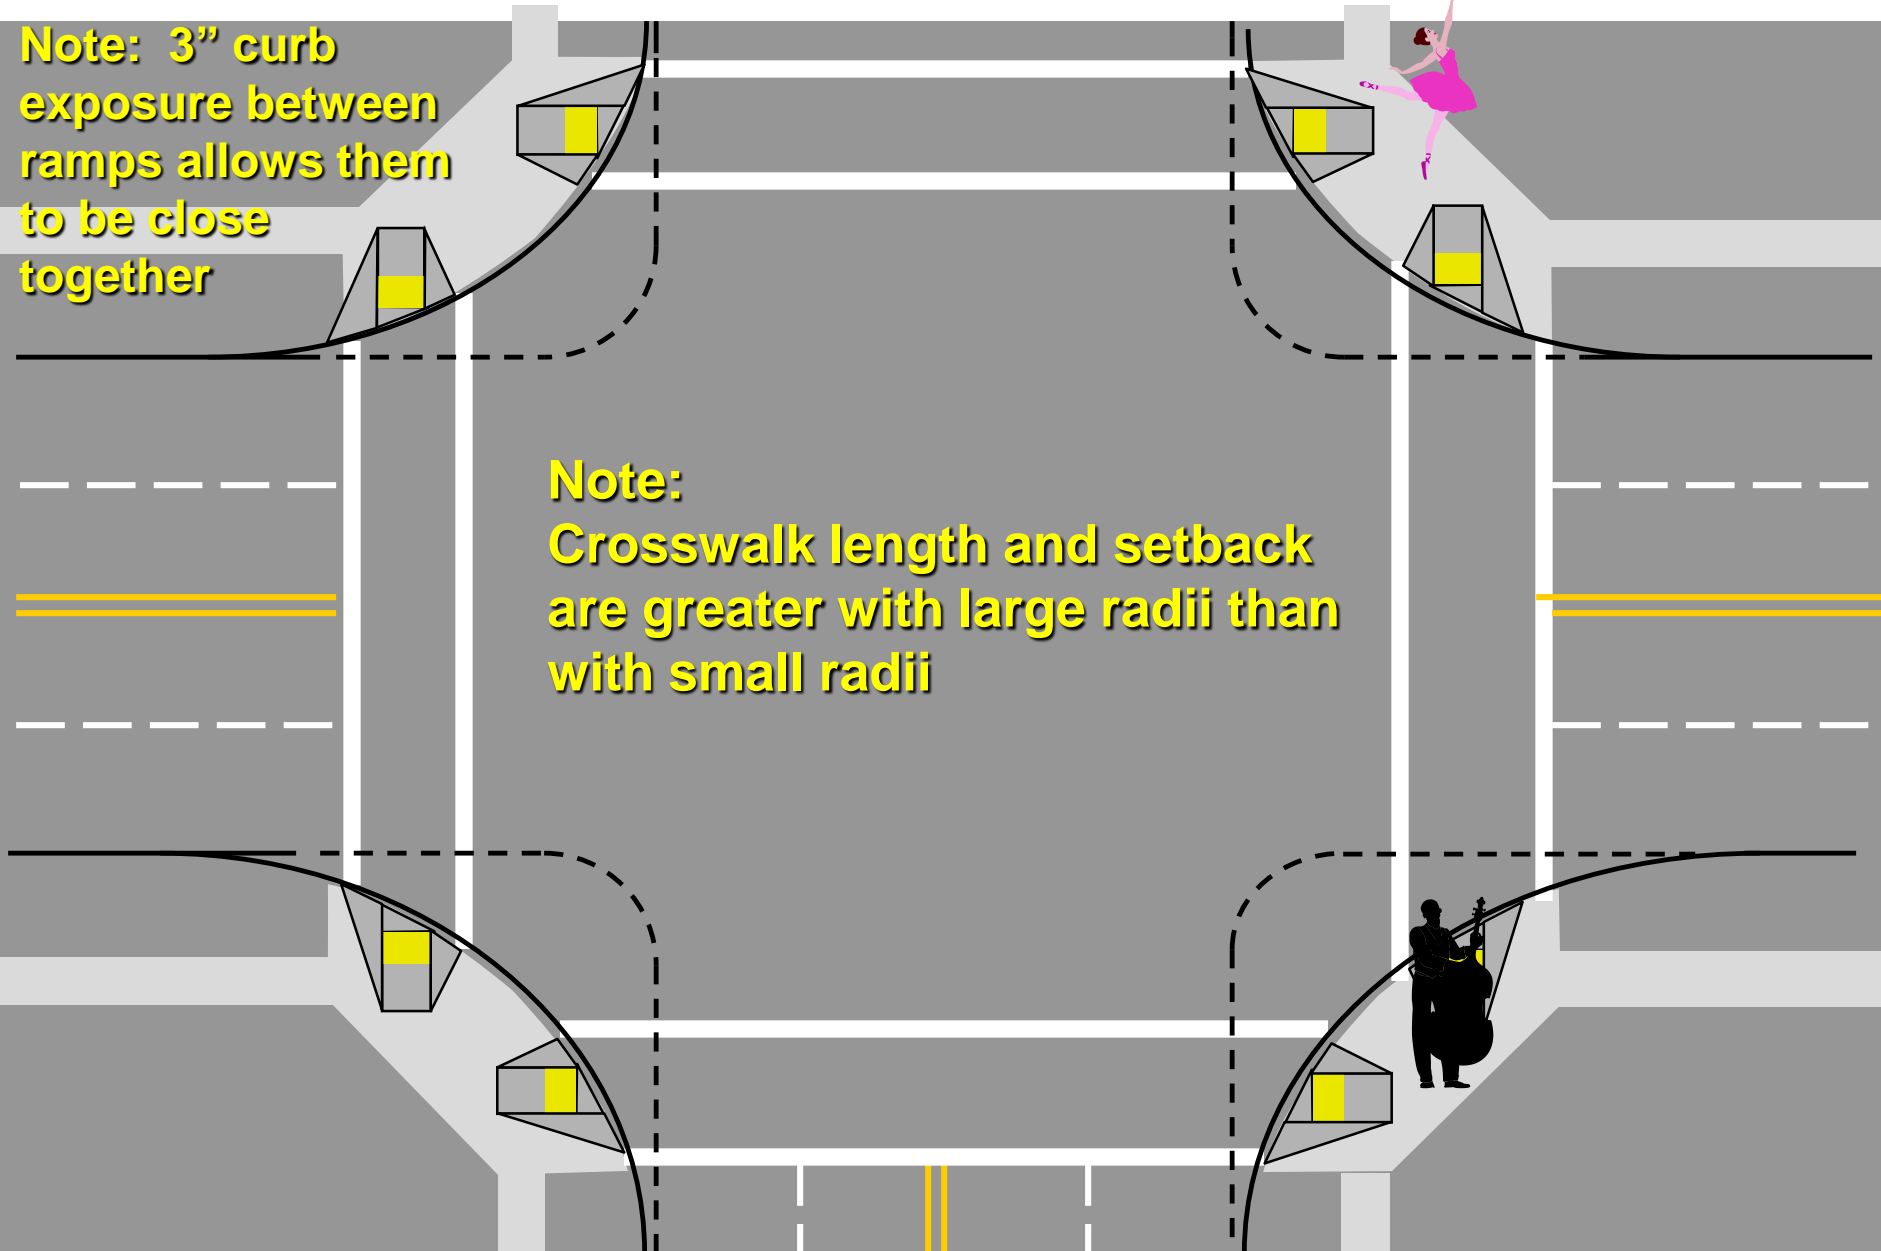



5-54

Corvallis OR

Crosswalk placement: Observe pedestrians


“When in doubt, paint it out!”

5-55

Honolulu HI



Crosswalks can have odd shapes to take pedestrians where they want to go

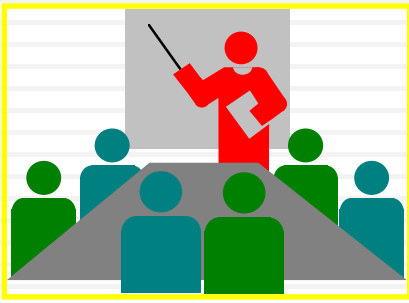

5-56

Discussion:


What are your policies & practices regarding crosswalk placement?


Pedestrian Islands

5-57

Benefits:

- Separate conflicts & decision points
- Reduce crossing distance
- Improve signal timing
- Reduce crashes

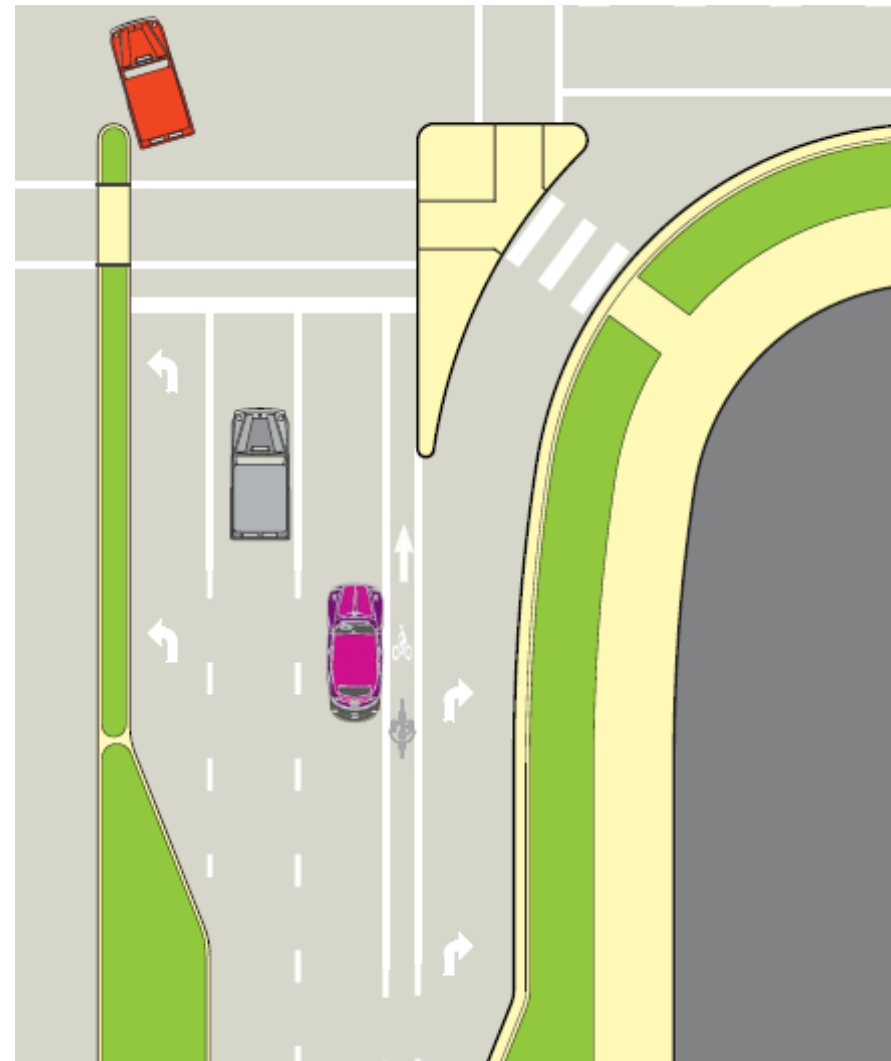

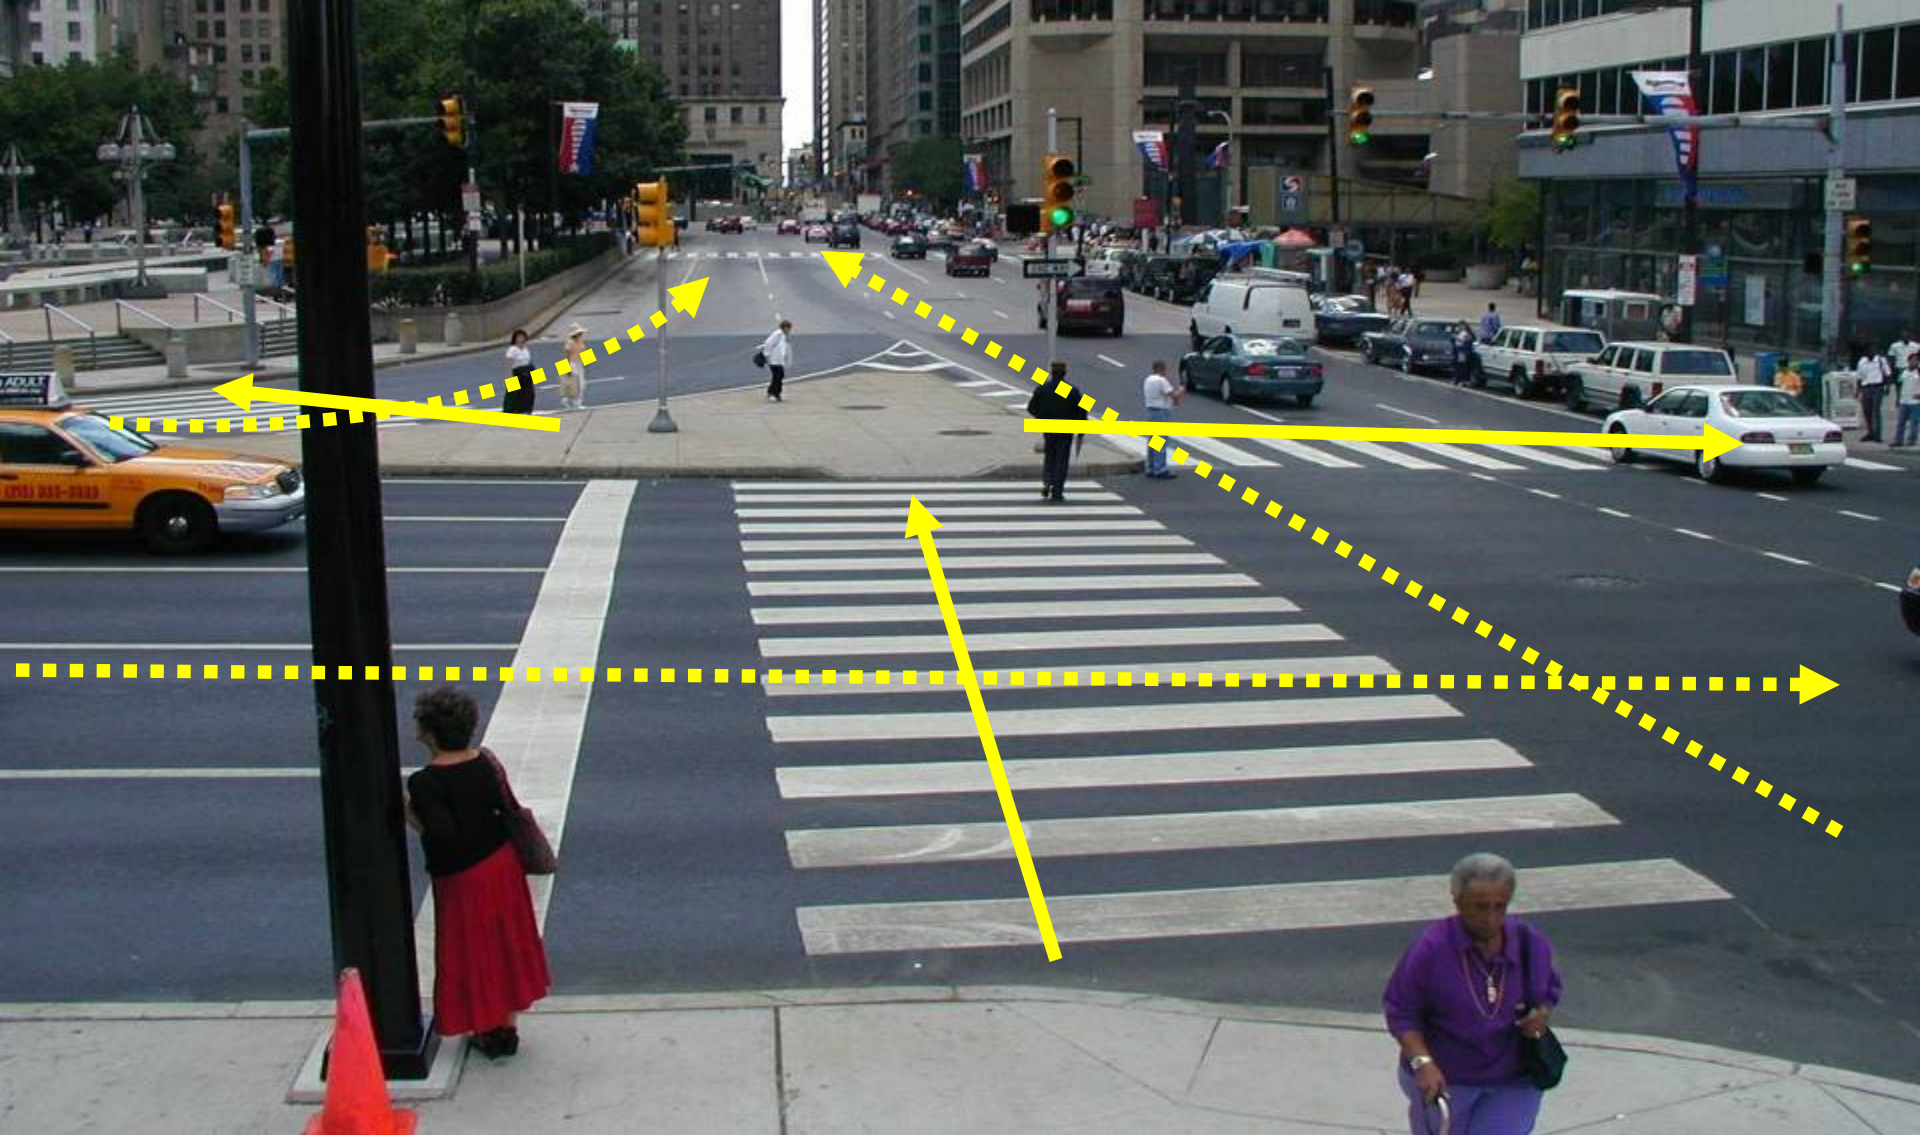


5-58

Philadelphia PA


Imagine the signal timing without island

Right-Turn Slip Lane: Design for Pedestrians

5-59

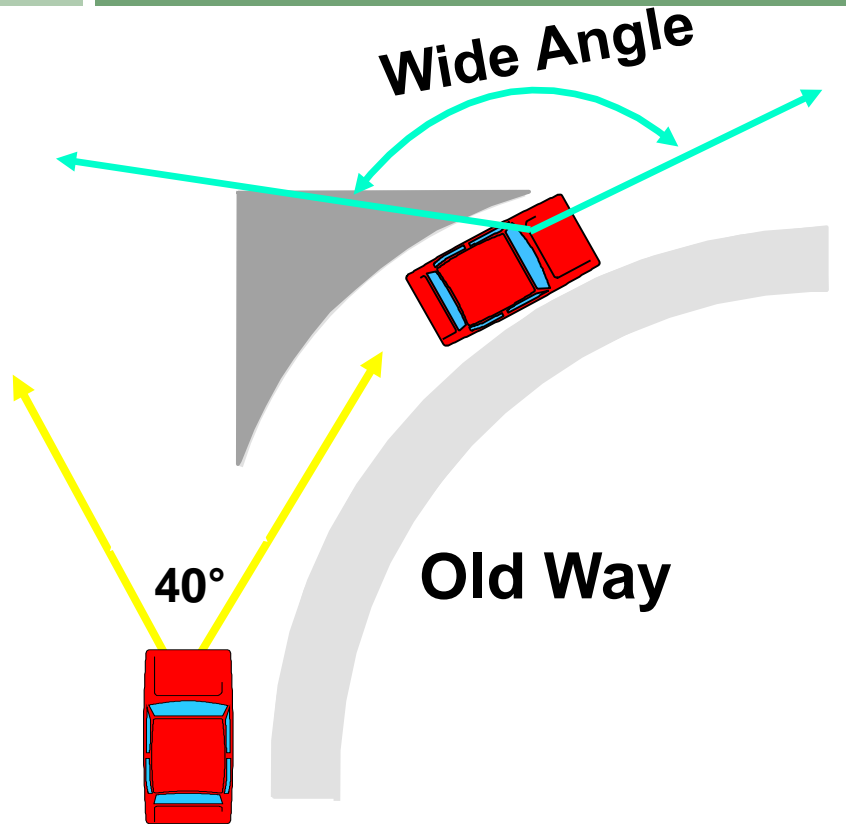


**High speed, head turner =
low visibility of pedestrians**

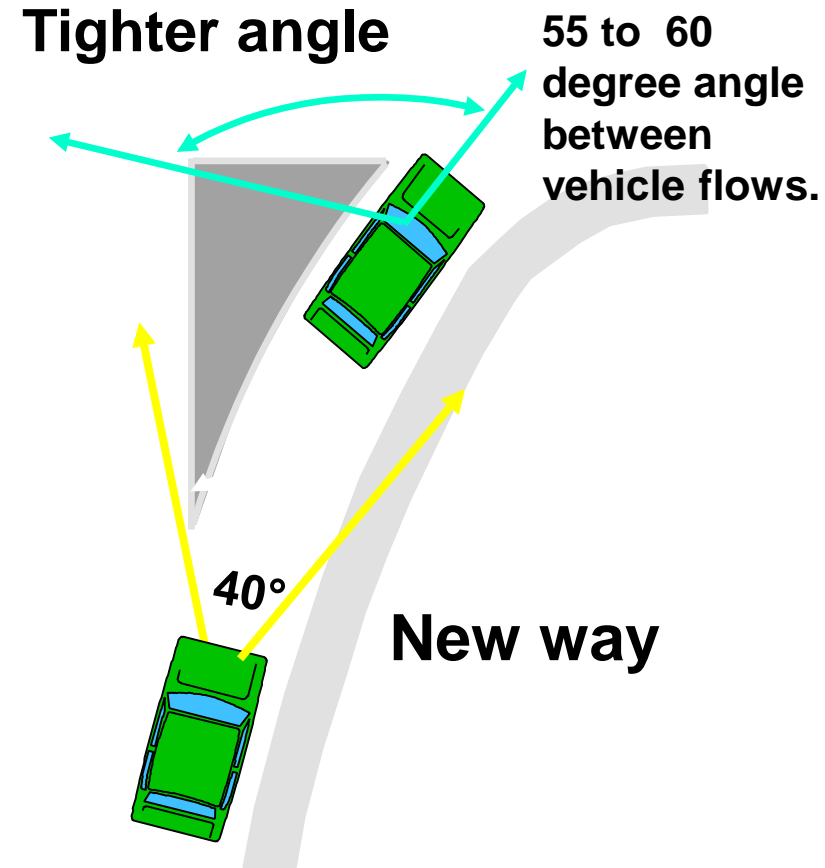

**Slow speed, good angle =
good visibility of pedestrians**

Right-Turn Slip Lane - Details

5-60

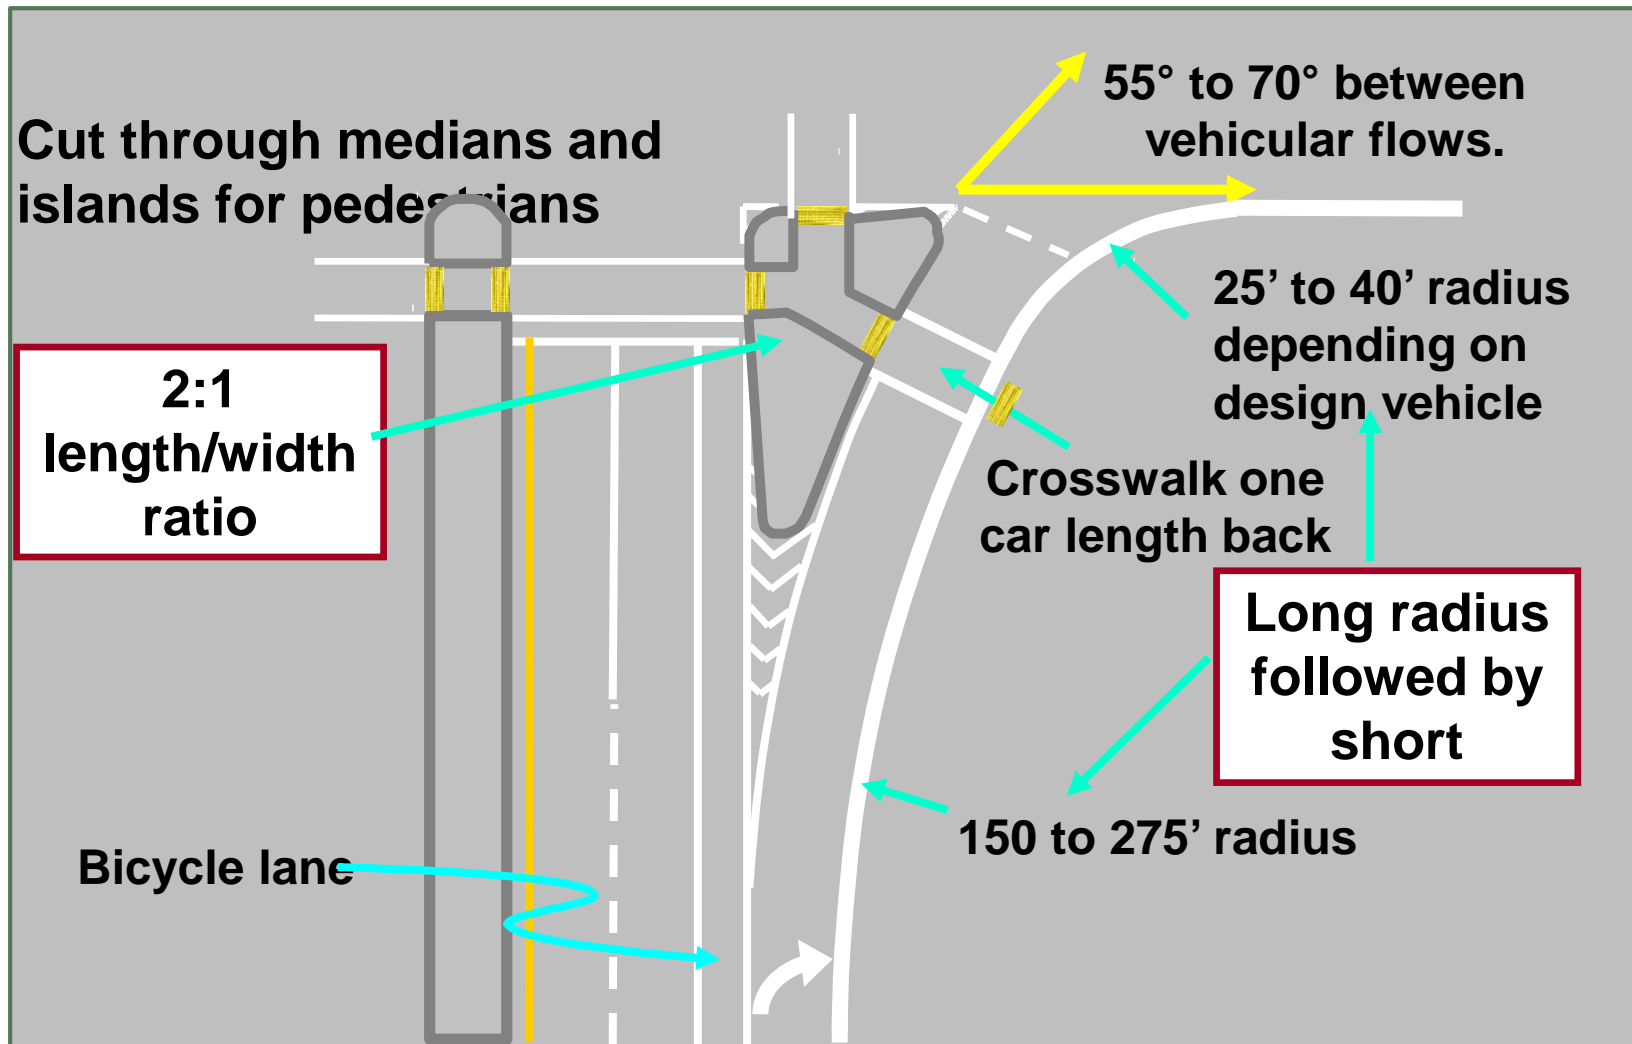




5-61

Fairbanks AK

Drivers naturally trace the right island shape

Designing for Pedestrian Safety – Intersection Geometry

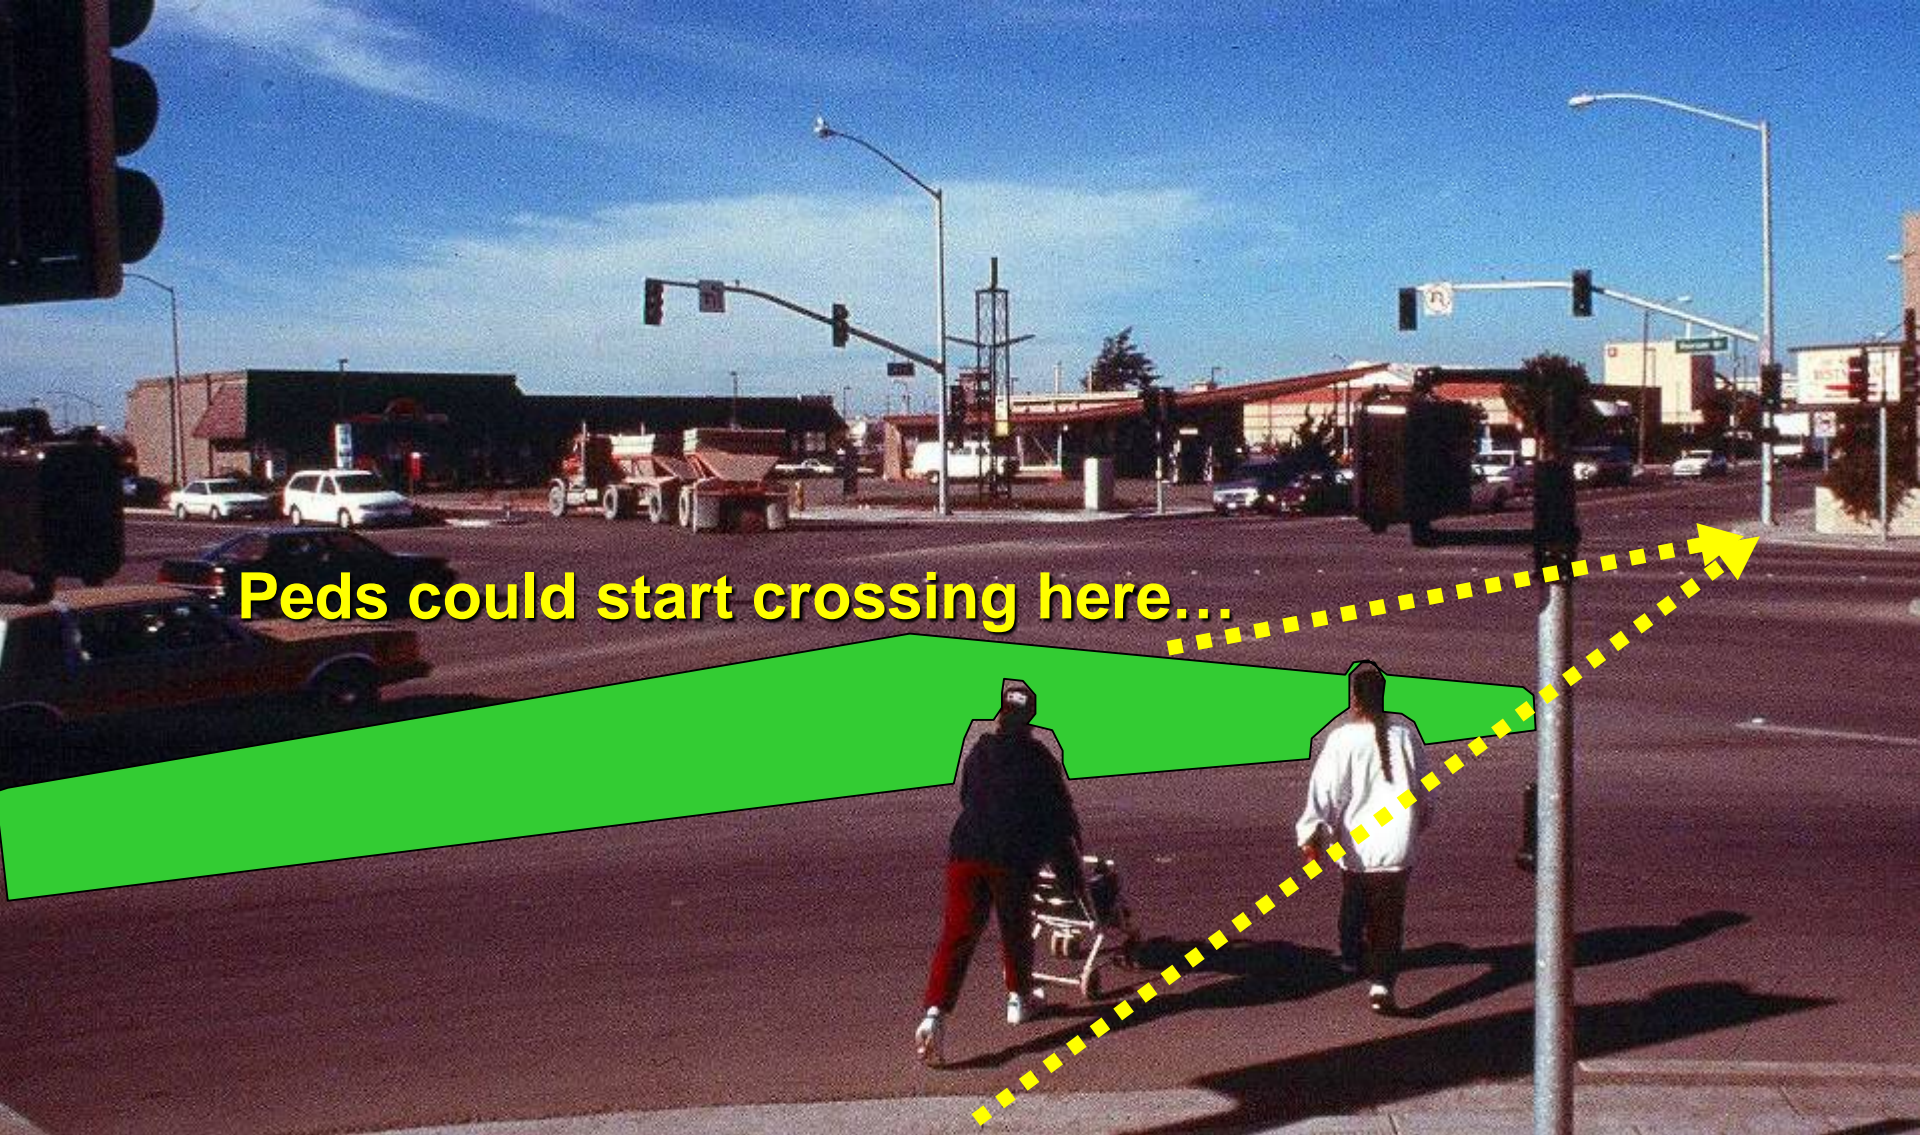

Peds could start crossing here...

5-62

Fresno CA

... instead of here



Should we mark this crosswalk?



**Yes: It's a yield-controlled approach,
and it may not be clear where peds cross.**

Raised islands can improve a large multi-lane intersection



Honolulu HI

Designing for Pedestrian Safety – Intersection Geometry

5-64

Raised islands can improve a large multi-lane intersection

- 1. Build raised islands
between thru & RT
lanes to separate
ped/driver conflicts.
Consolidate two
crosswalks into
one.**



Honolulu HI

Raised islands can improve a large multi-lane intersection

2. Move stop bar forward to improve capacity and safety for motorists



Island Design Details



5-67

Salem OR

- ❑ Cut-through preferred over ramps
- ❑ Truncated domes at cut-throughs
- ❑ 8' or more preferred width – 6' minimum



5-68

St Paul MN

With ramps, provide at least 48" level area



5-69

St Paul MN

NOT Okay

Designing for Pedestrian Safety – Intersection Geometry



Not acceptable



Acceptable, not great

St Paul MN

Designing for Pedestrian Safety – Intersection Geometry


5-70

Best:

5-71

- **Bullet nose protects pedestrians from high-speed left-turning cars**



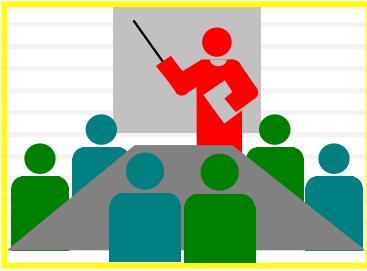

5-72

Discussion:

What are your policies & practices regarding providing pedestrian islands?

Intersection Geometry:

Recap of Design Measures

5-73

- Should pedestrians have access to all corners?
 - Yes
- Why?
 - Otherwise peds will dash across anyway
- Intersection geometry should be?
 - Tight (small radii); right angles
- How do you break up complex intersections?
 - With islands
- Where should you place crosswalks?
 - Where pedestrians want to cross and where drivers can see them

Intersection Geometry

Learning Outcomes

5-74

1. You should now be able to:
2. Explain why tight/right angle intersections are best
3. Describe why pedestrians need access to all corners
4. Assess good crosswalk placement: where peds want to cross & where drivers can see them
5. Explain how islands break up complex intersections

5-75

Questions?